

Описание на горизонтальные многоступенчатые насосы. Серия D, DF, DM, DG

По вопросам продаж и поддержки обращайтесь: csn@nt-rt.ru

www.cnprussia.nt-rt.ru

Архангельск (8182)63-90-72,
Астана+7(7172)727-132,
Белгород(4722)40-23-64,
Брянск(4832)59-03-52,
Владивосток(423)249-28-31,
Волгоград(844)278-03-48,
Вологда(8172)26-41-59,
Воронеж(473)204-51-73,
Екатеринбург(343)384-55-89,
Иваново(4932)77-34-06,
Ижевск(3412)26-03-58,
Казань(843)206-01-48,
Калининград(4012)72-03-81,
Калуга(4842)92-23-67,
Кемерово(3842)65-04-62,
Киров(8332)68-02-04,

Краснодар(861)203-40-90,
Красноярск(391)204-63-61,
Курск(4712)77-13-04,
Липецк(4742)52-20-81,
Магнитогорск(3519)55-03-13,
Москва(495)268-04-70,
Мурманск(8152)59-64-93,
Набережные Челны(8552)20-53-41,
Нижний Новгород(831)429-08-12,
Новокузнецк(3843)20-46-81,
Новосибирск(383)227-86-73,
Орел(4862)44-53-42,
Оренбург(3532)37-68-04,
Пенза(8412)22-31-16,
Пермь(342)205-81-47,
Ростов-на-Дону(863)308-18-15,

Рязань(4912)46-61-64,
Самара(846)206-03-16,
Санкт-Петербург(812)309-46-40,
Саратов(845)249-38-78,
Смоленск(4812)29-41-54,
Сочи(862)225-72-31,
Ставрополь(8652)20-65-13,
Тверь(4822)63-31-35,
Томск(3822)98-41-53,
Тула(4872)74-02-29,
Тюмень(3452)66-21-18,
Ульяновск(8422)24-23-59,
Уфа(347)229-48-12,
Челябинск(351)202-03-61,
Череповец(8202)49-02-64,
Ярославль(4852)69-52-93,




D、DF、DM



NANFANG PUMP INDUSTRY CO.,LTD.


D型泵型谱图 Selection Chart

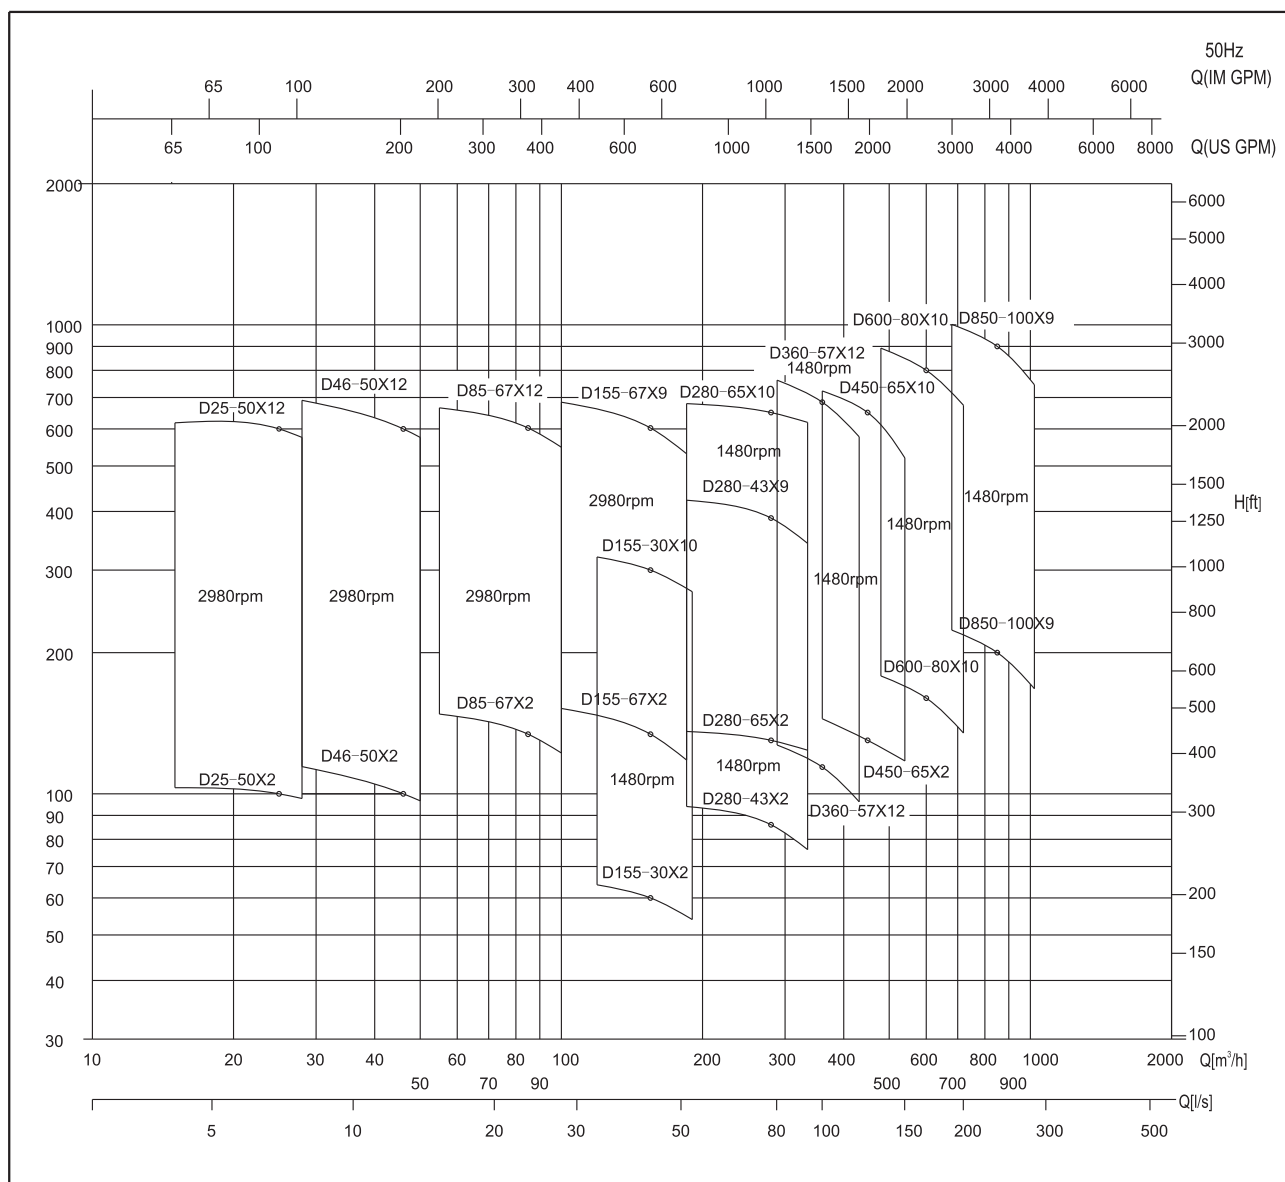

D型泵性能曲线 Performance Curve

D25-50

D₂=196mm 50Hz 2980rpm ISO 2548 Annex B

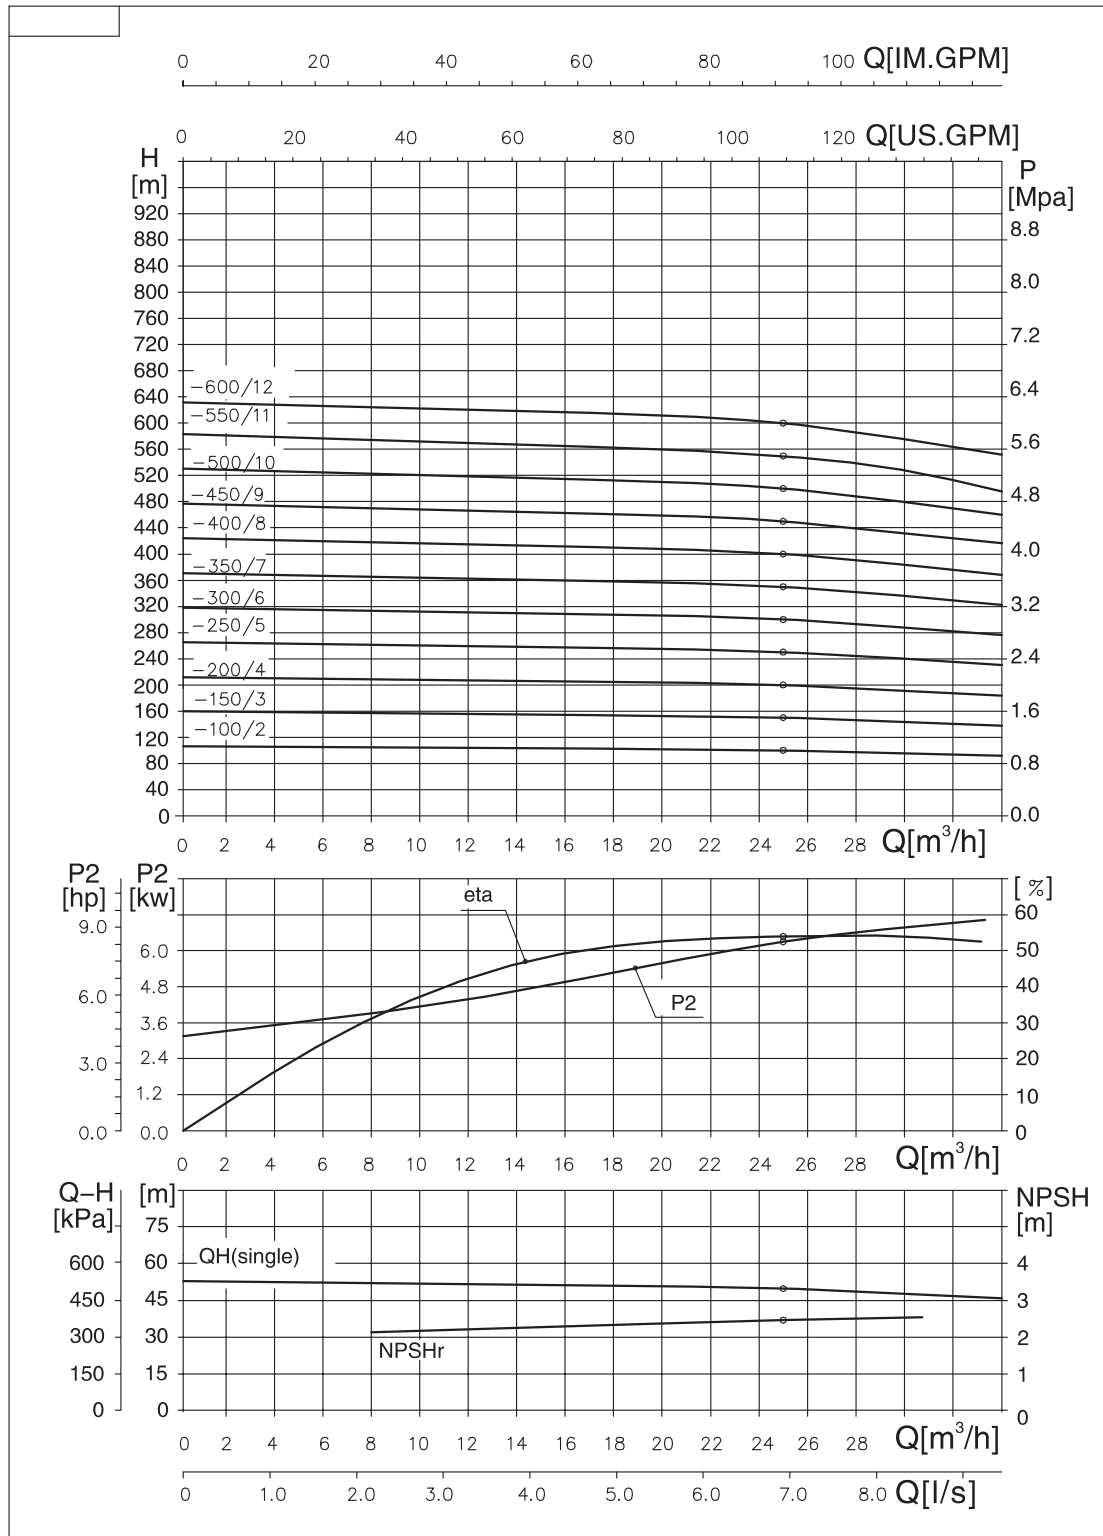

Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve


D46-50

D₂=208mm

50Hz

2980rpm

ISO 2548 Annex B

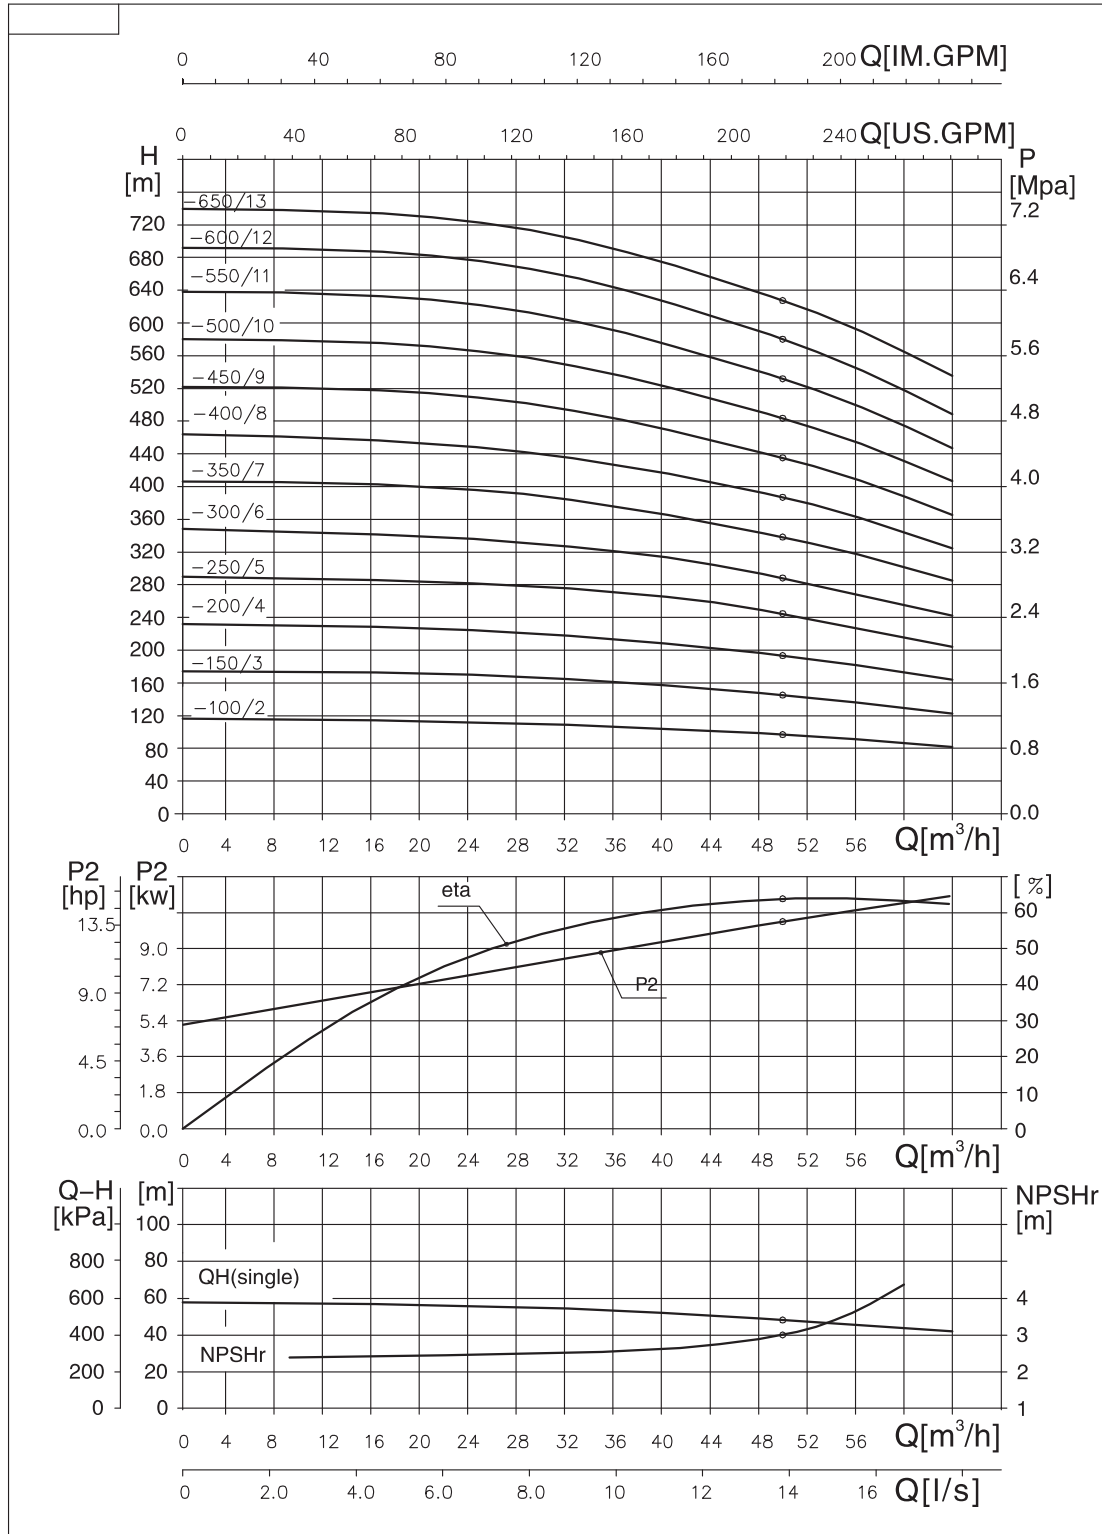


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D85-67

D₂=235mm 50Hz 2980rpm ISO 2548 Annex B

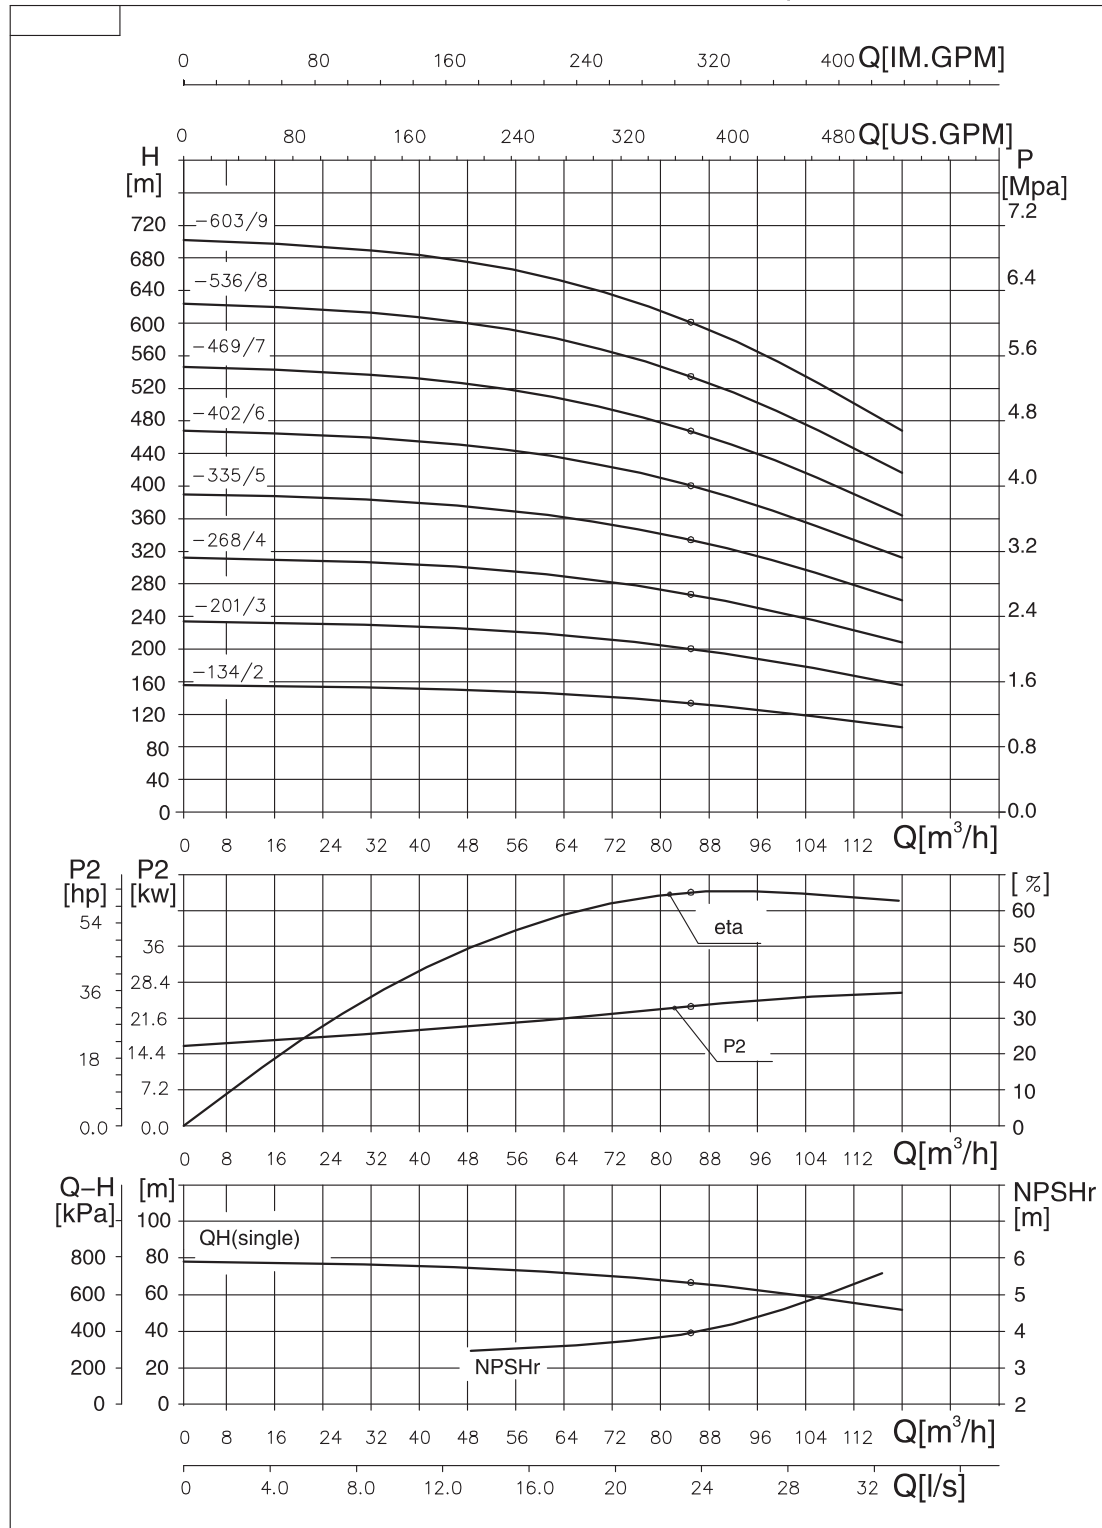


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D155-30

D₂=305mm 50Hz 1480rpm ISO 2548 Annex B

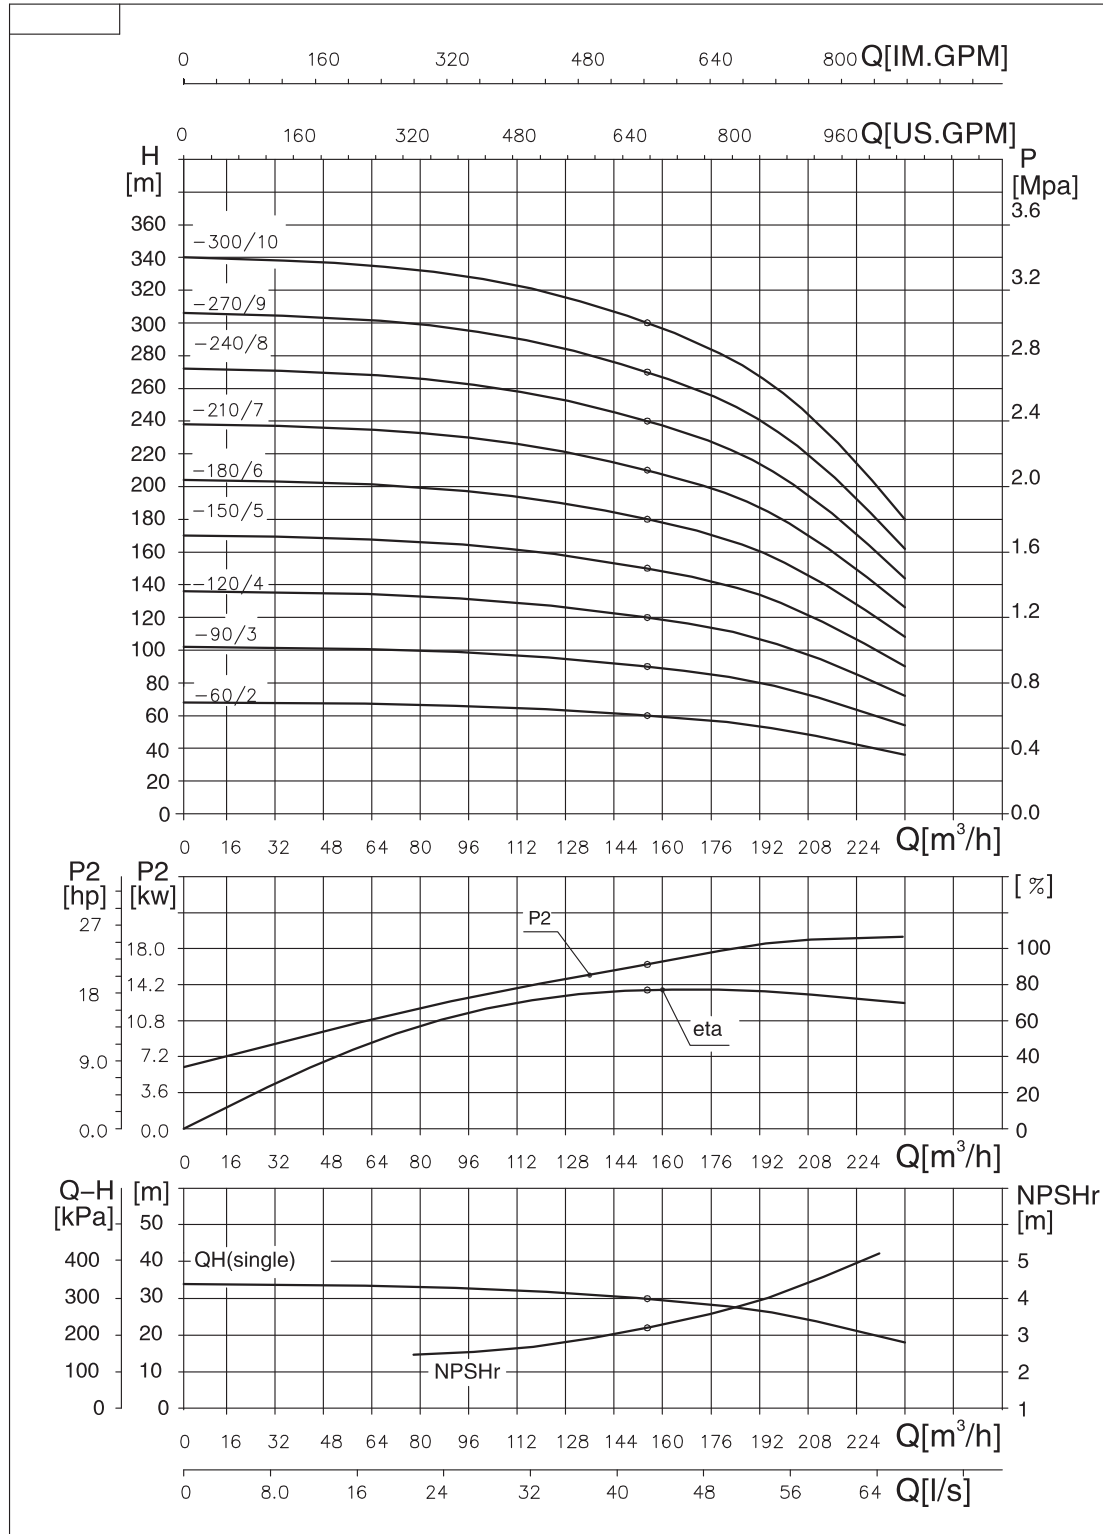


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D155-67

D₂=235mm 50Hz 2980rpm ISO 2548 Annex B

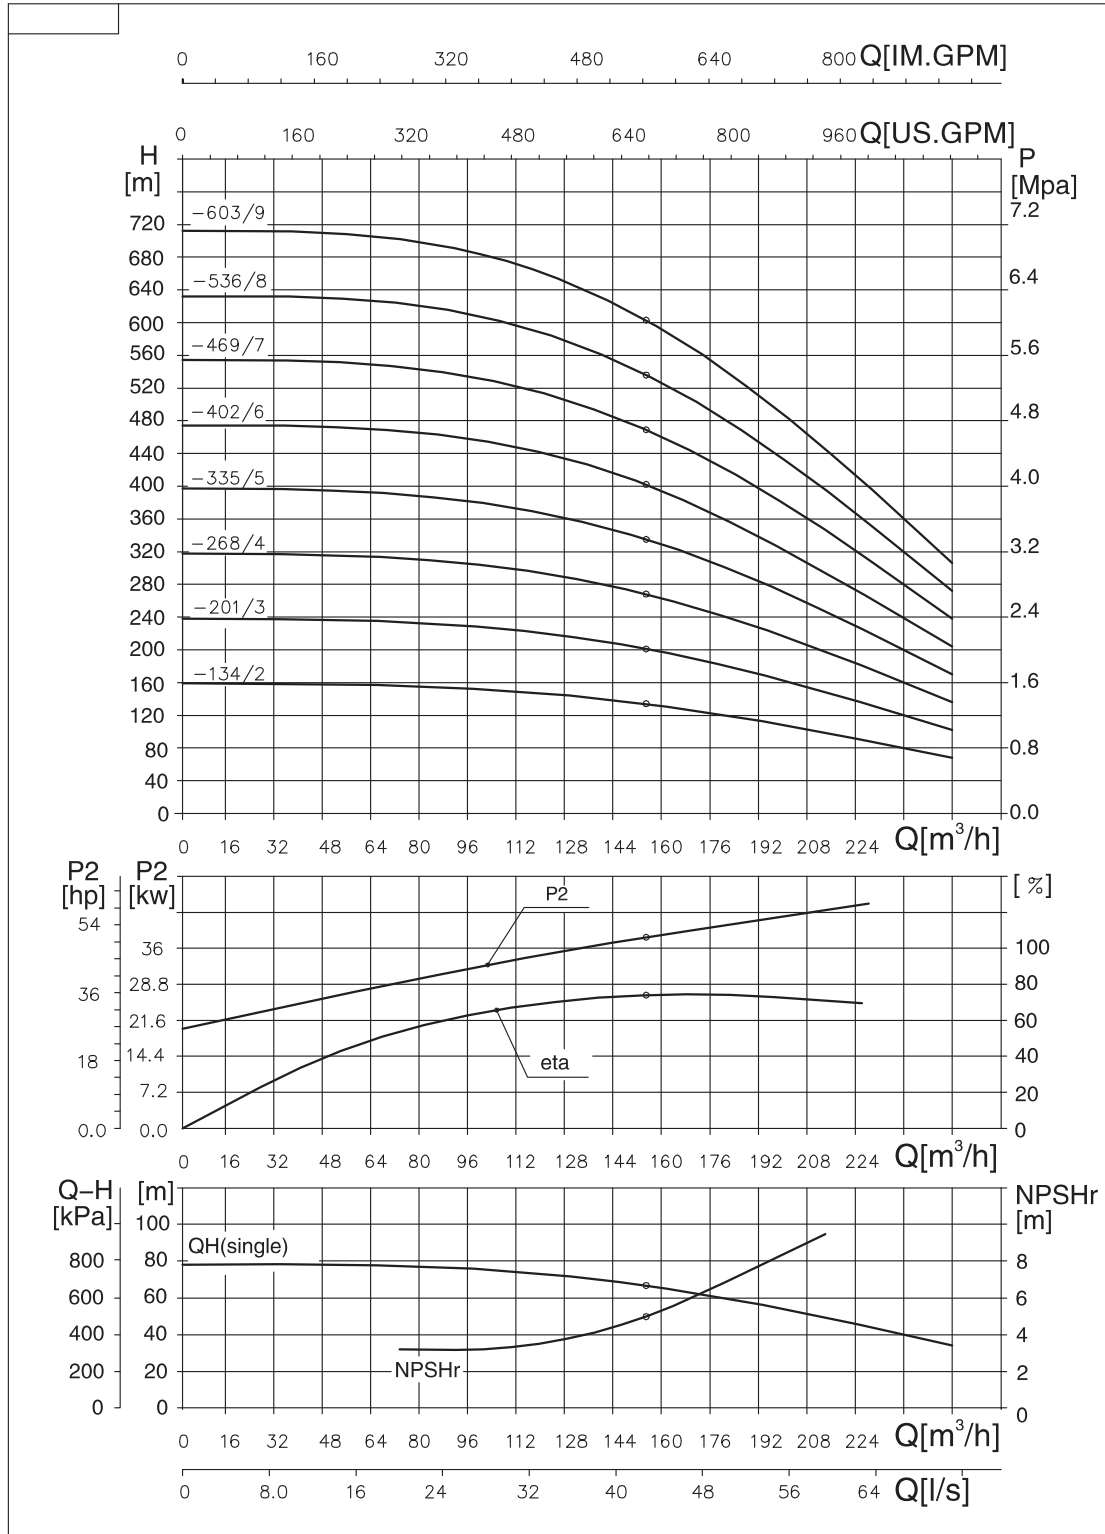


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D280-43

D₂=360mm 50Hz 1480rpm ISO 2548 Annex B

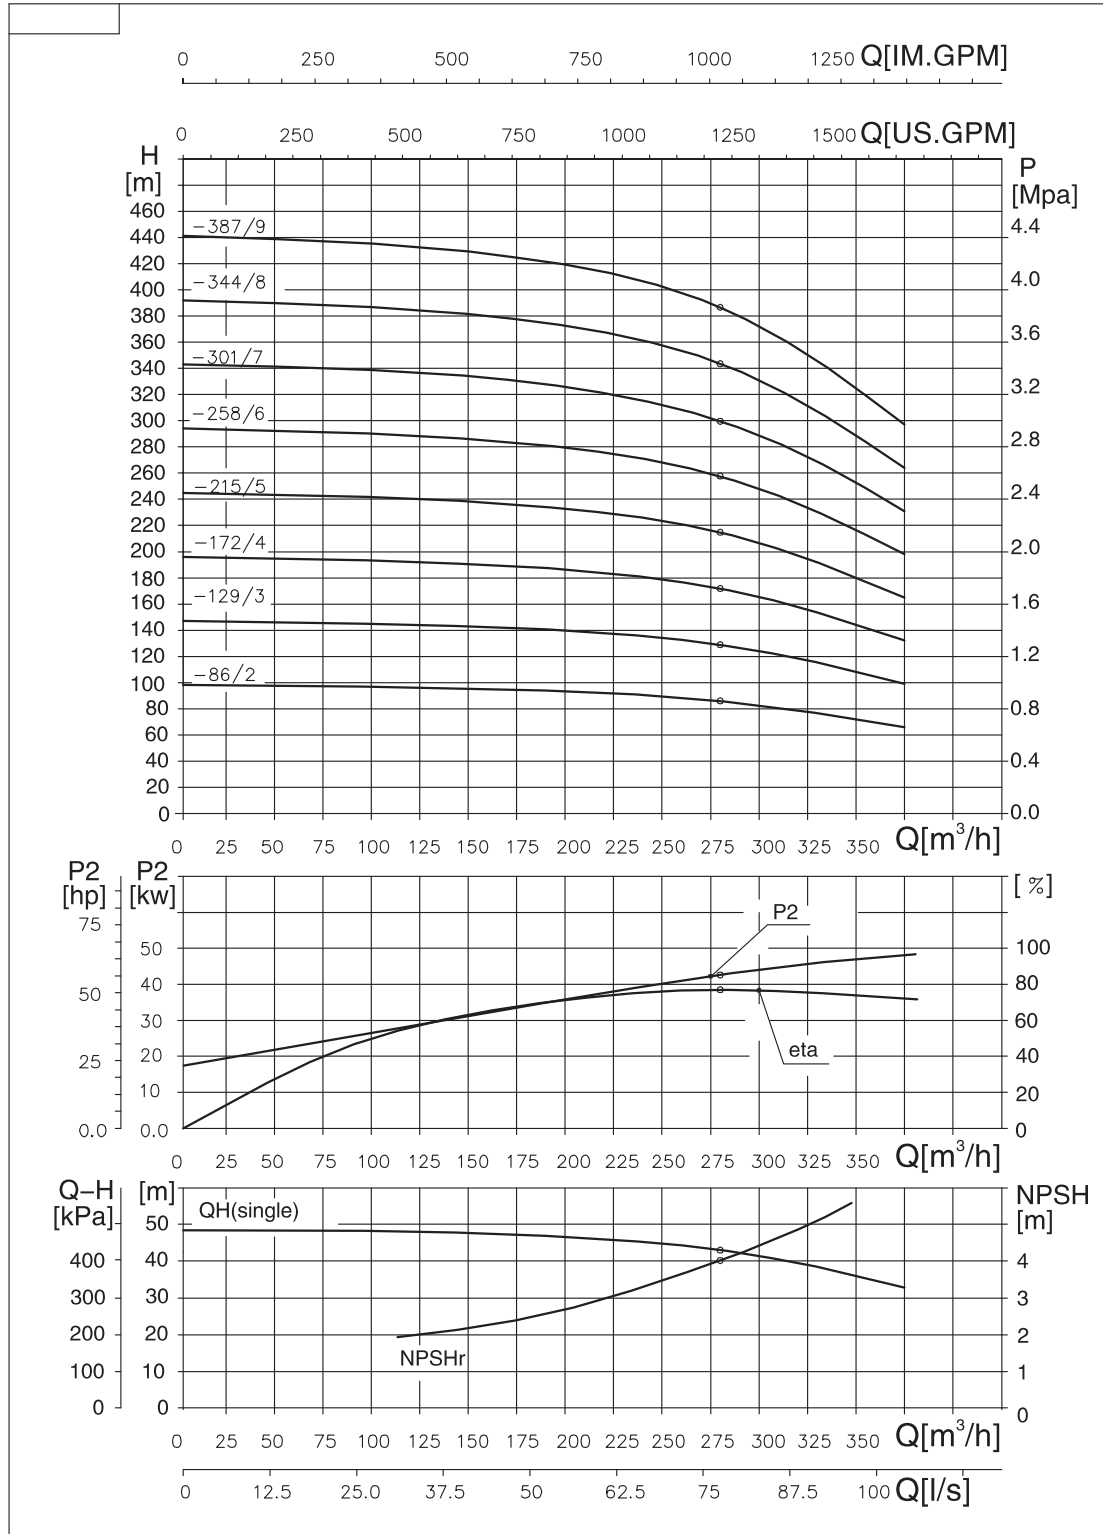


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D280-65

D₂=430mm 50Hz 1480rpm ISO 2548 Annex B

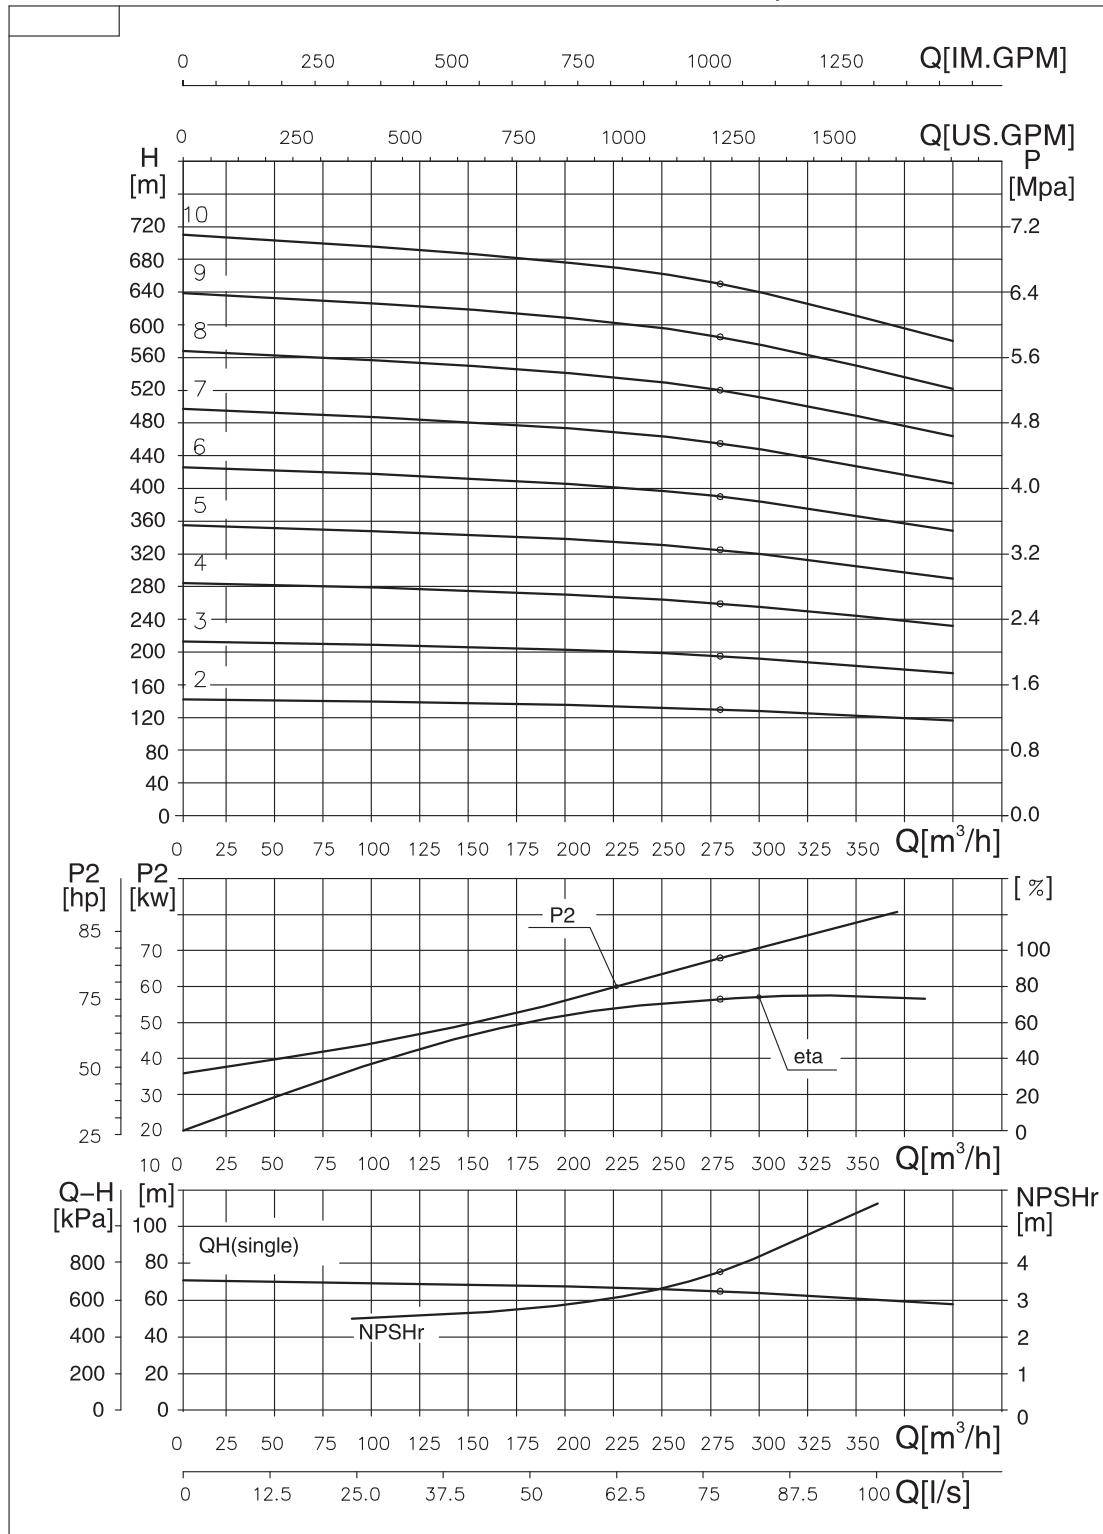


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D360-57

D₂=458mm 50Hz 1480rpm ISO 2548 Annex B

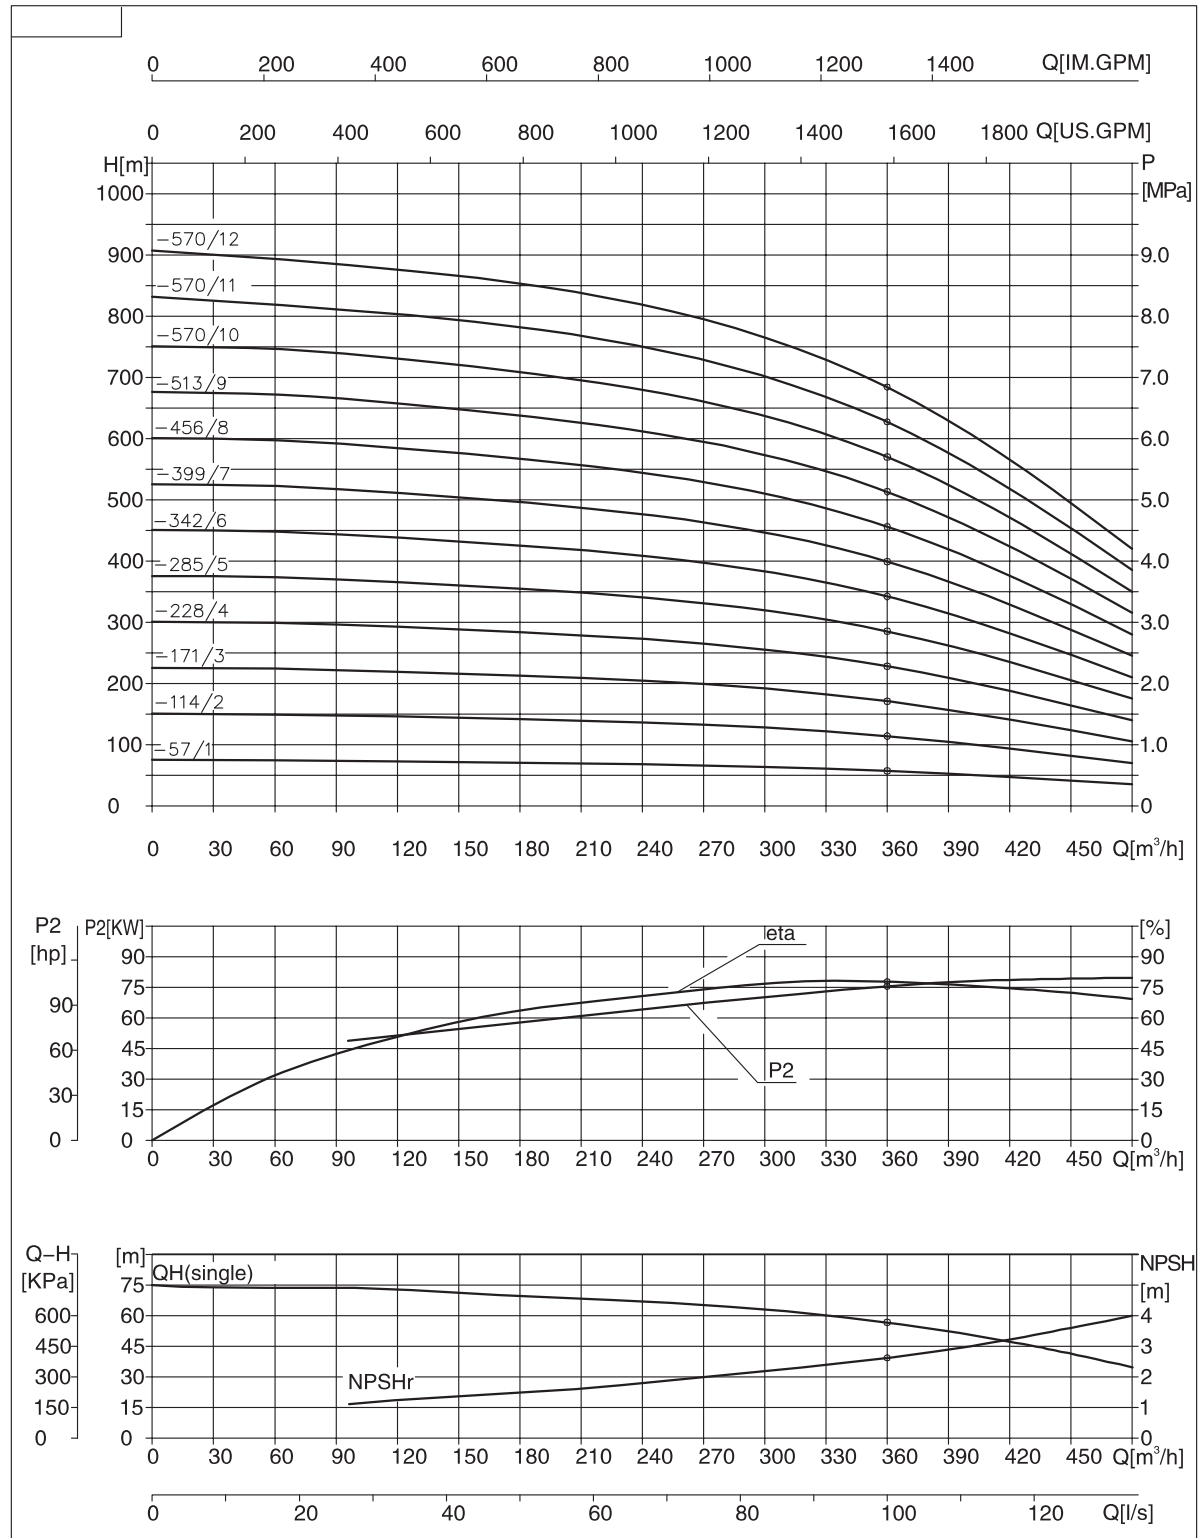


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D450-60

D₂=430mm 50Hz 1480rpm ISO 2548 Annex B

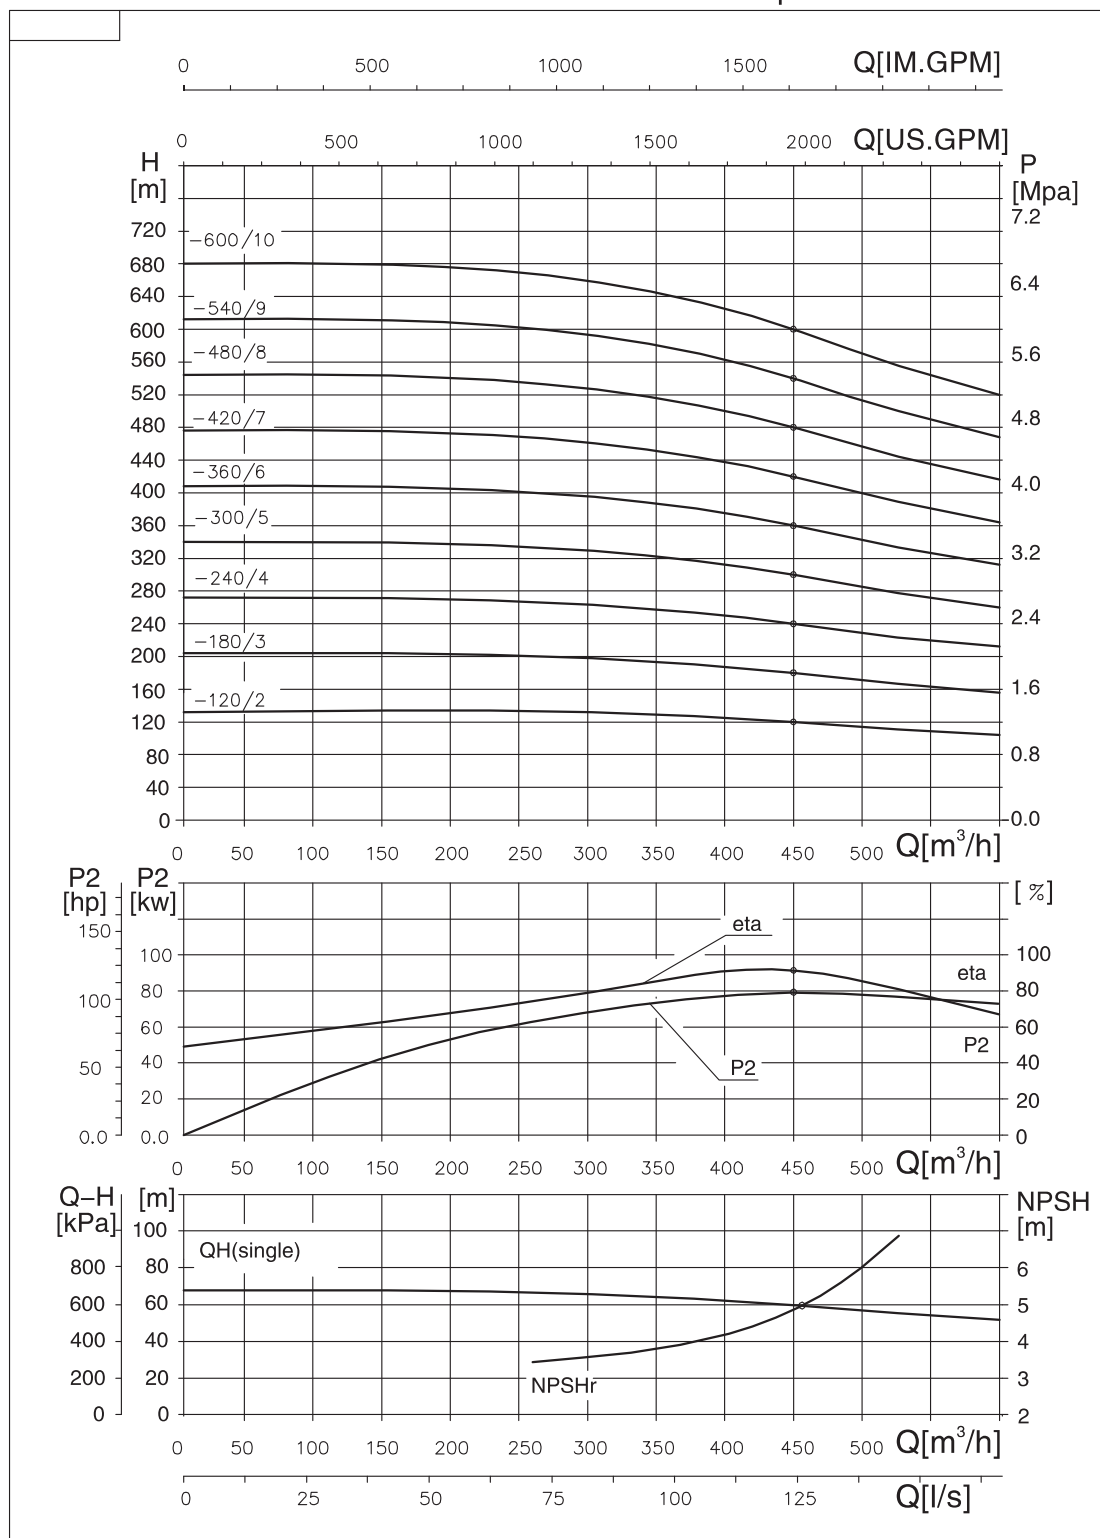


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D600-80

D₂=542mm 50Hz 1480rpm ISO 2548 Annex B

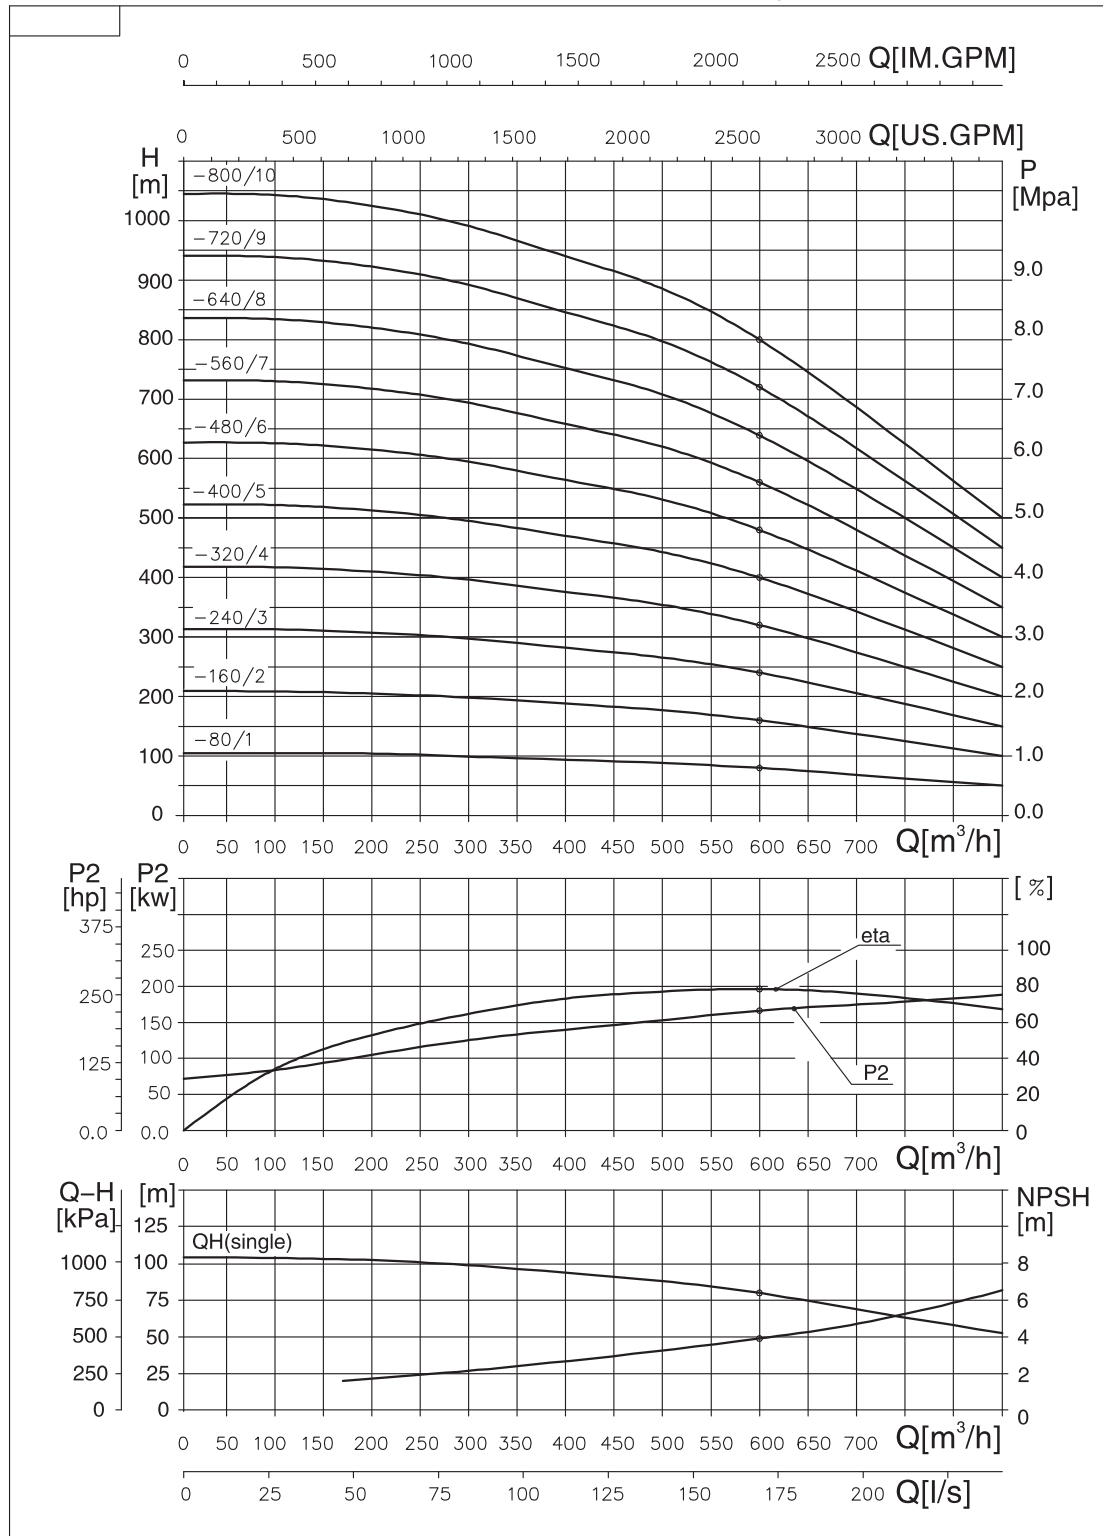


Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

D型泵性能曲线 Performance Curve

D850-100

D₂=606mm 50Hz 1480rpm ISO 2548 Annex B

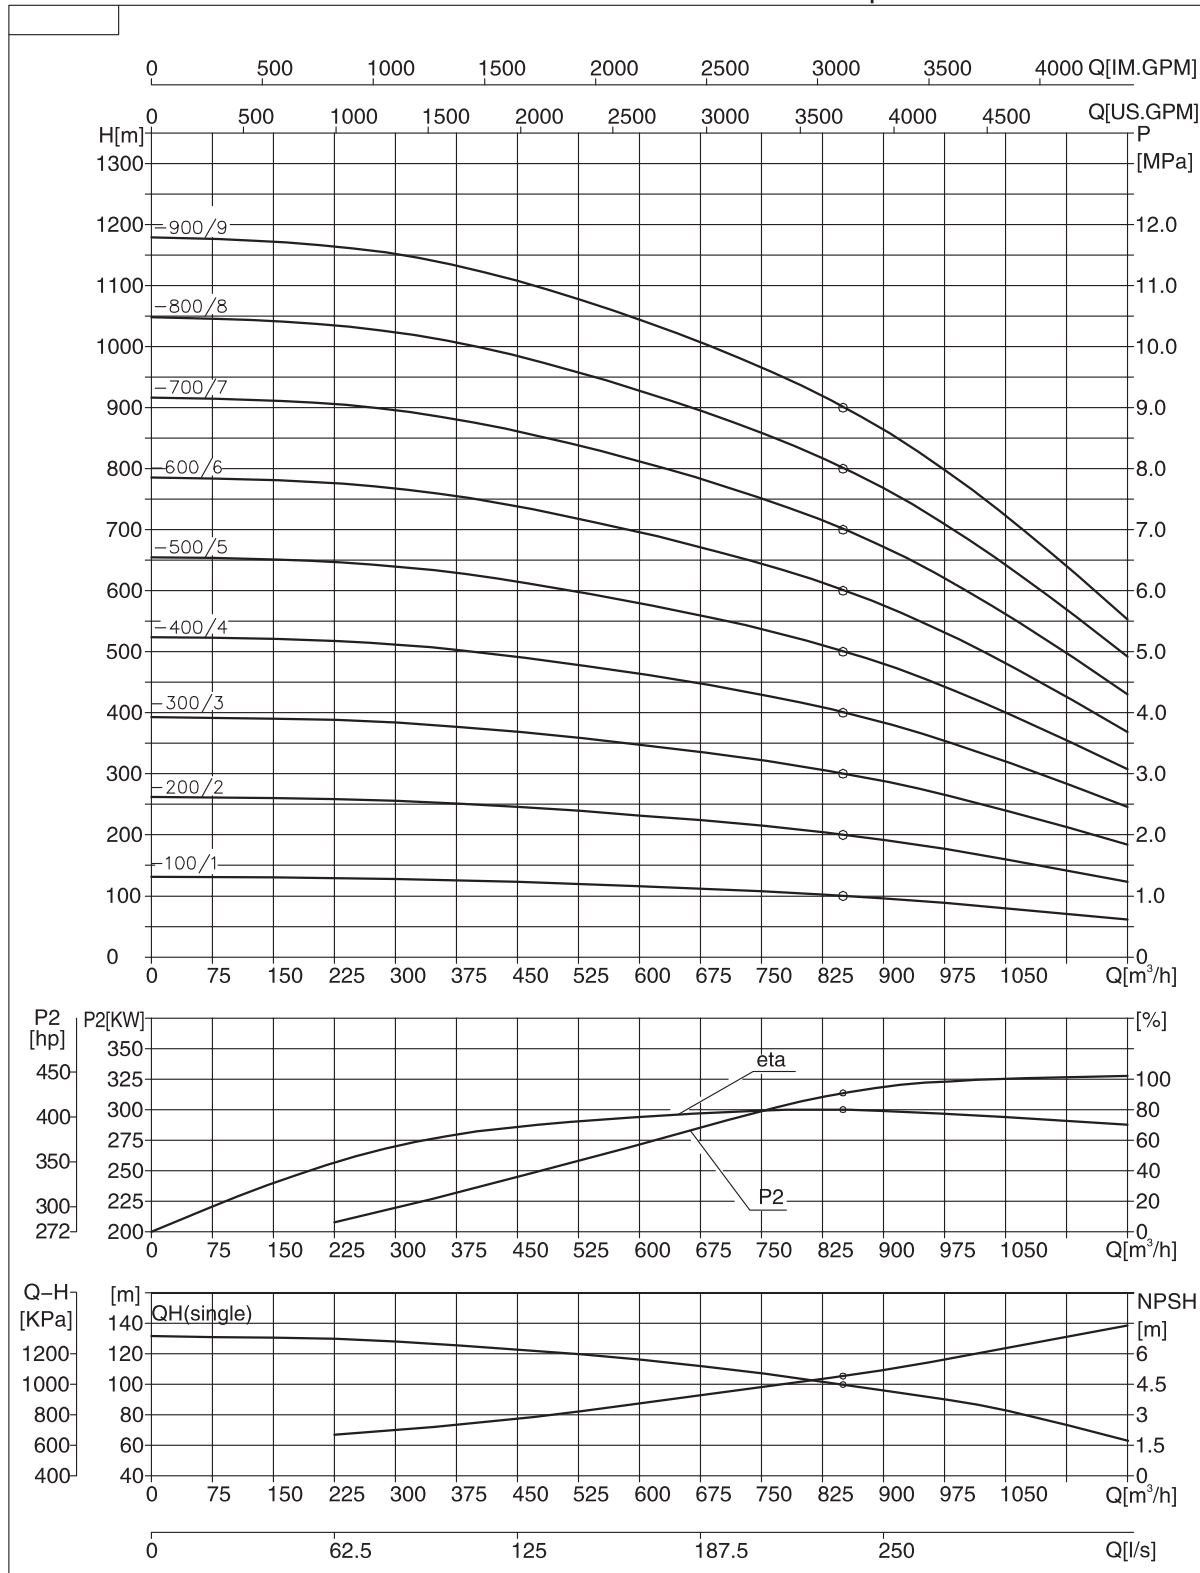

Head and power ratings apply to media with a density of $\rho=1\text{kg/dm}^3$ and a kinetic viscosity of $20\text{ mm}^2/\text{s}$.

泵性能表 Performance Data

参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft Power Pa	配带电动机		效率 Eff. η	必须汽 蚀余量 (NPSH)r
						功率 Rated Power	型号 Model		
产品型号 Model	m³/h	L/s	m	r/min	kw	kw		%	m
D25-50X3	15	4.17	154.5	2980	14.4	22	Y180M-2	44	2.4
	25	6.94	150		18.9			54	2.7
	28	7.78	144		20.3			54	2.8
D25-50X4	15	4.17	206	2980	19.1	30	Y200L1-2	44	2.4
	25	6.94	200		25.2			54	2.7
	28	7.78	192		27.1			54	2.8
D25-50X5	15	4.17	257.5	2980	23.9	37	Y200L2-2	44	2.4
	25	6.94	250		31.5			54	2.7
	28	7.78	240		33.9			54	2.8
D25-50X6	15	4.17	309	2980	28.7	45	Y225M-2	44	2.4
	25	6.94	300		37.8			54	2.7
	28	7.78	240		33.9			54	2.8
D25-50X7	15	4.17	360.5	2980	33.5	55	Y250M-2	44	2.4
	25	6.94	350		44.2			54	2.7
	28	7.78	336		47.5			54	2.8
D25-50X8	15	4.17	412	2980	38.3	75	Y280S-2	44	2.4
	25	6.94	400		50.5			54	2.7
	28	7.78	384		54.3			54	2.8
D25-50X9	15	4.17	463.5	2980	43.1	75	Y280S-2	44	2.4
	25	6.94	450		56.8			54	2.7
	28	7.78	432		61.0			54	2.8
D25-50X10	15	4.17	515	2980	47.8	75	Y280S-2	44	2.4
	25	6.94	500		63.1			54	2.7
	28	7.78	480		67.8			54	2.8
D25-50X11	15	4.17	566.5	2980	52.6	90	Y280M-2	44	2.4
	25	6.94	550		69.4			54	2.7
	28	7.78	528		74.6			54	2.8
D25-50X12	15	4.17	618	2980	57.4	110	Y315S-2	44	2.4
	25	6.94	600		75.7			54	2.7
	28	7.78	576		81.4			54	2.8
D46-50X3	28	7.78	172.5	2980	24.4	37	Y200L2-2	54	2.5
	46	12.78	150		29.8			63	2.8
	50	13.89	144		30.7			64	3.2
D46-50X4	28	7.78	230	2980	32.5	45	Y225M-2	54	2.5
	46	12.78	200		39.8			63	2.8
	50	13.89	192		40.9			64	3.2
D46-50X5	28	7.78	287.5	2980	40.6	55	Y250M-2	54	2.5
	46	12.78	250		49.7			63	2.8
	50	13.89	240		51.1			64	3.2

泵性能表 Performance Data

参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft Power Pa	配带电动机		效率 Eff. η	必须汽 蚀余量 (NPSH)r
						功率 Rated Power	型号 Model		
产品型号 Model	m³/h	L/s	m	r/min	kw	kw		%	m
D46-50X6	28	7.78	345	2980	48.7	75	Y280S-2	54	2.5
	46	12.78	300		59.7			63	2.8
	50	13.89	288		61.3			64	3.2
D46-50X7	28	7.78	402.5	2980	56.9	90	Y280M-2	54	2.5
	46	12.78	350		69.6			63	2.8
	50	13.89	336		71.5			64	3.2
D46-50X8	28	7.78	460	2980	65.0	90	Y280M-2	54	2.5
	46	12.78	400		79.6			63	2.8
	50	13.89	384		81.8			64	3.2
D46-50X9	28	7.78	517.5	2980	73.1	110	Y315S-2	54	2.5
	46	12.78	450		89.5			63	2.8
	50	13.89	432		92.0			64	3.2
D46-50X10	28	7.78	575	2980	81.2	132	Y315M-2	54	2.5
	46	12.78	500		99.5			63	2.8
	50	13.89	480		102.2			64	3.2
D46-50X11	28	7.78	632.5	2980	89.4	132	Y315M-2	54	2.5
	46	12.78	550		109.4			63	2.8
	50	13.89	528		112.4			64	3.2
D46-50X12	28	7.78	690	2980	97.5	160	Y315L1-2	54	2.5
	46	12.78	600		119.4			63	2.8
	50	13.89	576		122.6			64	3.2
D85-67X3	55	15.28	222	2980	61.6	90	Y280M-2	54	3.3
	85	23.61	201		71.6			65	4
	100	27.78	183		76.7			65	4.4
D85-67X4	55	15.28	296	2980	82.2	110	Y315S-2	54	3.3
	85	23.61	268		95.5			65	4
	100	27.78	244		102.3			65	4.4
D85-67X5	55	15.28	370	2980	102.7	132	Y315M-2	54	3.3
	85	23.61	335		119.4			65	4
	100	27.78	305		127.9			65	4.4
D85-67X6	55	15.28	444	2980	123.2	160	Y315L1-2	54	3.3
	85	23.61	402		143.3			65	4
	100	27.78	366		153.4			65	4.4
D85-67X7	55	15.28	518	2980	143.8	200	Y315L2-2	54	3.3
	85	23.61	469		167.1			65	4
	100	27.78	427		179.0			65	4.4
D85-67X8	55	15.28	592	2980	164.3	220	Y355M1-2	54	3.3
	85	23.61	536		191.0			65	4
	100	27.78	488		204.6			65	4.4

泵性能表 Performance Data

参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft Power Pa	配带电动机		效率 Eff. η	必须汽 蚀余量 (NPSH)r
						功率 Rated Power	型号 Model		
产品型号 Model	m³/h	L/s	m	r/min	kw	kw		%	m
D85-67X9	55	15.28	666	2980	184.8	250	Y355M2-2	54	3.3
	85	23.61	603		214.9			65	4
	100	27.78	549		230.2			65	4.4
D155-67X3	100	26.38	228	2980	97.1	132	Y315M-2	64	3.2
	155	43.06	201		114.7			74	5
	185	51.38	177		123.9			72	6.6
D155-67X4	100	26.38	304	2980	153.4	200	Y315L2-2	54	3.2
	155	43.06	268		174.1			65	5
	185	51.38	236		183.0			65	6.6
D155-67X5	100	26.38	380	2980	161.8	220	Y355M1-2	64	3.2
	155	43.06	335		191.2			74	5
	185	51.38	295		206.6			72	6.6
D155-67X6	100	26.38	456	2980	230.1	280	Y355L1-2	54	3.2
	155	43.06	402		261.2			65	5
	185	51.38	354		274.6			65	6.6
D155-67X7	100	26.38	532	2980	226.5	315	Y355L2-2	64	3.2
	155	43.06	469		267.7			74	5
	185	51.38	413		289.2			72	6.6
D155-67X8	100	26.38	608	2980	306.8	355	Y355-2	54	3.2
	155	43.06	536		348.3			65	5
	185	51.38	472		366.1			65	6.6
D155-67X9	100	26.38	684	2980	291.2	400	Y355-2	64	3.2
	155	43.06	603		344.2			74	5
	185	51.38	531		371.8			72	6.6
D155-30X2	119	33.06	64	1480	28.8	55	Y225M-4	72	2.7
	155	43.06	60		32.9			77	3.2
	190	52.78	54		36.5			76.5	3.9
D155-30X3	119	33.06	96	1480	43.2	75	Y280S-4	72	2.7
	155	43.06	90		49.4			77	3.2
	190	52.78	81		54.8			76.5	3.9
D155-30X4	119	33.06	128	1480	57.6	90	Y280M-4	72	2.7
	155	43.06	120		65.8			77	3.2
	190	52.78	108		73.1			76.5	3.9
D155-30X5	119	33.06	160	1480	72.1	110	Y315S-4	72	2.7
	155	43.06	150		82.3			77	3.2
	190	52.78	135		91.4			76.5	3.9
D155-30X6	119	33.06	192	1480	86.5	132	Y315M-4	72	2.7
	155	43.06	180		98.7			77	3.2
	190	52.78	162		109.6			76.5	3.9

泵性能表 Performance Data

参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft Power Pa	配带电动机		效率 Eff. η	必须汽 蚀余量 (NPSH)r
						功率 Rated Power	型号 Model		
产品型号 Model	m³/h	L/s	m	r/min	kw	kw		%	m
D155-30X7	119	33.06	224	1480	100.9	160	Y315L1-4	72	2.7
	155	43.06	210		115.2			77	3.2
	190	52.78	189		127.9			76.5	3.9
D155-30X8	119	33.06	256	1480	115.3	160	Y315L1-4	72	2.7
	155	43.06	240		131.6			77	3.2
	190	52.78	216		146.2			76.5	3.9
D155-30X9	119	33.06	288	1480	129.7	200	Y315L2-4	72	2.7
	155	43.06	270		148.1			77	3.2
	190	52.78	243		164.5			76.5	3.9
D155-30X10	119	33.06	320	1480	144.1	200	Y315L2-4	72	2.7
	155	43.06	300		164.6			77	3.2
	190	52.78	270		182.7			76.5	3.9
D280-43X2	185	51.39	94	1480	65.8	110	Y315S-4	72	2.5
	280	77.78	86		85.2			77	4
	335	93.06	76		90.7			76.5	5.2
D280-43X3	185	51.39	141	1480	98.7	160	Y315L1-4	72	2.5
	280	77.78	129		127.8			77	4
	335	93.06	114		136.0			76.5	5.2
D280-43X4	185	51.39	188	1480	131.6	200	Y315L2-4	72	2.5
	280	77.78	172		170.4			77	4
	335	93.06	152		181.4			76.5	5.2
D280-43X5	185	51.39	235	1480	164.5	280	Y355L1-4	72	2.5
	280	77.78	215		213.0			77	4
	335	93.06	190		226.7			76.5	5.2
D280-43X6	185	51.39	282	1480	197.4	315	Y355L2-4	72	2.5
	280	77.78	258		255.7			77	4
	335	93.06	228		272.1			76.5	5.2
D280-43X7	185	51.39	329	1480	230.4	355	Y4001-4	72	2.5
	280	77.78	301		298.3			77	4
	335	93.06	266		317.4			76.5	5.2
D280-43X8	185	51.39	376	1480	263.3	400	Y4002-4	72	2.5
	280	77.78	344		340.9			77	4
	335	93.06	304		362.8			76.5	5.2
D280-43X9	185	51.39	423	1480	296.2	450	Y4003-4	72	2.5
	280	77.78	387		383.5			77	4
	335	93.06	342		408.1			76.5	5.2
D280-65X3	185	51.39	204	1480	168.6	280	Y355L1-4	61	2.8
	280	77.78	195		203.8			73	3.7
	335	93.06	186		226.4			75	5

泵性能表 Performance Data

参数 Parameter	流量 Capacity		扬程 Head H	转速 Speed n	轴功率 Shaft Power Pa	配带电动机		效率 Eff. η	必须汽 蚀余量 (NPSH) r
						功率 Rated Power	型号 Model		
	m³/h	L/s				kw			
D280-65X4	185	51.39	272	1480	224.8	355	Y4001-4	61	2.8
	280	77.78	260		271.8			73	3.7
	335	93.06	248		301.9			75	5
D280-65X5	185	51.39	340	1480	281.0	450	Y4003-4	61	2.8
	280	77.78	325		339.7			73	3.7
	335	93.06	310		377.3			75	5
D280-65X6	185	51.39	408	1480	337.2	500	Y4004-4	61	2.8
	280	77.78	390		407.6			73	3.7
	335	93.06	372		452.8			75	5
D280-65X7	185	51.39	476	1480	393.4	630	Y4501-4	61	2.8
	280	77.78	455		475.6			73	3.7
	335	93.06	434		528.3			75	5
D280-65X8	185	51.39	544	1480	449.6	710	Y4502-4	61	2.8
	280	77.78	520		543.5			73	3.7
	335	93.06	496		603.7			75	5
D280-65X9	185	51.39	612	1480	505.8	800	Y4503-4	61	2.8
	280	77.78	585		611.4			73	3.7
	335	93.06	558		679.2			75	5
D280-65X10	185	51.39	680	1480	562.0	900	Y4504-4	61	2.8
	280	77.78	650		679.4			73	3.7
	335	93.06	620		754.6			75	5
D360-57X2	288	80	129.9	1480	134.0	200	Y315L2-4	76.1	2.23
	360	100	114		143.7			77.8	2.75
	432	120	89.2		140.9			74.5	3.4
D360-57X3	288	80	194.7	1480	200.8	250	Y355M2-4	76.1	2.23
	360	100	171		215.6			77.8	2.75
	432	120	133.9		211.6			74.5	3.4
D360-57X4	288	80	259.5	1480	267.6	355	Y4001-4	76.1	2.23
	360	100	228		287.5			77.8	2.75
	432	120	178.6		282.2			74.5	3.4
D360-57X5	288	80	324.3	1480	334.4	450	Y4003-4	76.1	2.23
	360	100	285		359.4			77.8	2.75
	432	120	223.3		352.8			74.5	3.4
D360-57X6	288	80	389.1	1480	401.3	500	Y4004-4	76.1	2.23
	360	100	342		431.2			77.8	2.75
	432	120	268		423.5			74.5	3
D360-57X7	288	80	453.9	1480	468.1	630	Y4501-4	76.1	2.23
	360	100	399		503.1			77.8	2.75
	432	120	312.7		494.1			74.5	3.4

泵性能表 Performance Data

参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft Power Pa	配带电动机		效率 Eff. η	必须汽 蚀余量 (NPSH) r
						功率 Rated Power	型号 Model		
	m³/h	L/s	m	r/min	kw	kw		%	m
D360-57X8	288	80	518.7	1480	534.9	710	Y4502-4	76.1	2.23
	360	100	456		575.0			77.8	2.75
	432	120	357.4		564.7			74.5	3.4
D360-57X9	288	80	583.5	1480	601.7	800	Y4503-4	76.1	2.23
	360	100	513		646.9			77.8	2.75
	432	120	402.1		635.4			74.5	3.4
D360-57X10	288	80	684	1480	705.4	900	Y4504-4	76.1	2.23
	360	100	570		718.7			77.8	2.75
	432	120	456		720.5			74.5	3.4
D360-57X11	288	80	752.4	1480	775.9	1000	Y5001-4	76.1	2.23
	360	100	627		790.6			77.8	2.75
	432	120	501.6		792.6			74.5	3
D360-57X12	288	80	820.8	1480	846.5	1120	Y5002-4	76.1	2.23
	360	100	684		862.5			77.8	2.75
	432	120	547.2		864.6			74.5	3.4
D450-60X3	335	93.06	195	1480	255.0	355	Y4001-4	69.8	3.8
	450	125	180		294.3			75	4.9
	500	138.89	171		298.7			78	6
D450-60X4	335	93.06	260	1480	340.0	450	Y4003-4	69.8	3.8
	450	125	240		392.4			75	4.9
	500	138.89	228		398.3			78	6
D450-60X5	335	93.06	325	1480	425.0	560	Y4005-4	69.8	3.8
	450	125	300		490.5			75	4.9
	500	138.89	285		497.8			78	6
D450-60X6	335	93.06	390	1480	510.1	710	Y4502-4	69.8	3.8
	450	125	360		588.6			75	4.9
	500	138.89	342		597.4			78	6
D450-60X7	335	93.06	455	1480	595.1	800	Y4503-4	69.8	3.8
	450	125	420		686.7			75	4.9
	500	138.89	399		697.0			78	6
D450-60X8	335	93.06	520	1480	680.1	900	Y4504-4	69.8	3.8
	450	125	480		784.8			75	4.9
	500	138.89	456		796.5			78	6
D450-60X9	335	93.06	585	1480	765.1	1000	Y5001-4	69.8	3.8
	450	125	540		882.9			75	4.9
	500	138.89	513		896.1			78	6
D450-60X10	335	93.06	650	1480	850.1	1120	Y5002-4	69.8	3.8
	450	125	600		981.0			75	4.9
	500	138.89	570		995.7			78	6


泵性能表 Performance Data

参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft Power Pa	配带电动机		效率 Eff. η	必须汽 蚀余量 (NPSH) r
						功率 Rated Power	型号 Model		
	m³/h	L/s				kw		%	m
D600-80X2	480	133.33	179.6	1480	306.3	400	Y4002-4	76.7	3.1
	600	166.67	160		333.2			78.5	3.8
	720	200	132.3		341.5			76	4.8
D600-80X3	480	133.33	269.6	1480	459.8	630	Y4501-4	76.7	3.1
	600	166.67	240		499.9			78.5	3.9
	720	200	198.6		512.7			76	4.8
D600-80X4	480	133.33	359.6	1480	613.2	800	Y4503-4	76.7	3.1
	600	166.67	320		666.5			78.5	3.8
	720	200	264.9		683.9			76	4.8
D600-80X5	480	133.33	449.6	1480	766.7	1000	Y5001-4	76.7	3.1
	600	166.67	400		833.1			78.5	3.8
	720	200	331.2		855.0			76	4.8
D600-80X6	480	133.33	539.6	1480	920.2	1250	Y5003-4	76.7	3.1
	600	166.67	480		999.7			78.5	3.8
	720	200	397.5		1026.2			76	4.8
D600-80X7	480	133.33	629.6	1480	1073.7	1400	Y5004-4	76.7	3.1
	600	166.67	560		1166.4			78.5	3.8
	720	200	463.8		1197.3			76	4.8
D600-80X8	480	133.33	719.6	1480	1227.2	1600	Y5601-4	76.7	3.1
	600	166.67	640		1333.0			78.5	3.8
	720	200	530.1		1368.5			76	4.8
D600-80X9	480	133.33	809.6	1480	1380.6	1800	Y5602-4	76.7	3.1
	600	166.67	720		1499.6			78.5	3.8
	720	200	596.4		1539.7			76	4.8
D600-80X10	480	133.33	960	1480	1637.1	2000	Y5603-4	76.7	3.1
	600	166.67	800		1666.2			78.5	3.8
	720	200	640		1652.2			76	4.8
D850-100X2	680	188.89	223.4	1480	534.1	710	Y4502-4	77.5	3.96
	850	236.1	200		586.4			79	4.88
	1020	283.33	165.6		608.0			75.7	6.07
D850-100X3	680	188.89	335.1	1480	801.2	1120	Y5002-4	77.5	3.96
	850	236.1	300		879.6			79	4.88
	1020	283.33	248.4		912.1			75.7	6.07
D850-100X4	680	188.89	446.8	1480	1068.3	1400	Y5004-4	77.5	3.96
	850	236.1	400		1172.8			79	4.88
	1020	283.33	331.2		1216.1			75.7	6.07
D850-100X5	680	188.89	558.5	1480	1335.4	1800	Y5602-4	77.5	3.96
	850	236.1	500		1466.0			79	4.88
	1020	283.33	414		1520.1			75.7	6.07


泵性能表 Performance Data

参数 Parameter	流量 Capacity Q		扬程 Head H	转速 Speed n	轴功率 Shaft Power Pa	配带电动机		效率 Eff. η	必须汽 蚀余量 (NPSH) r
						功率 Rated Power	型号 Model		
	m³/h	L/s				kw			
D850-100X6	680	188.89	670.2	1480	1602.4	2240	Y6301-4	77.5	3.96
	850	236.1	600		1759.2			79	4.88
	1020	283.33	496.8		1824.1			75.7	6.07
D850-100X7	680	188.89	781.9	1480	1869.5	2500	Y6302-4	77.5	3.96
	850	236.1	700		2052.4			79	4.88
	1020	283.33	579.6		2128.1			75.7	6.07
D850-100X8	680	188.89	893.6	1480	2136.6	2800	Y6303-4	77.5	3.96
	850	236.1	800		2345.6			79	4.88
	1020	283.33	662.4		2432.2			75.7	6.07
D850-100X9	680	188.89	1005.3	1480	2403.6	3150	YKK710-4	77.5	3.96
	850	236.1	900		2638.8			79	4.88
	1020	283.33	745.2		2736.2			75.7	6.07


D25-50 外形安装图

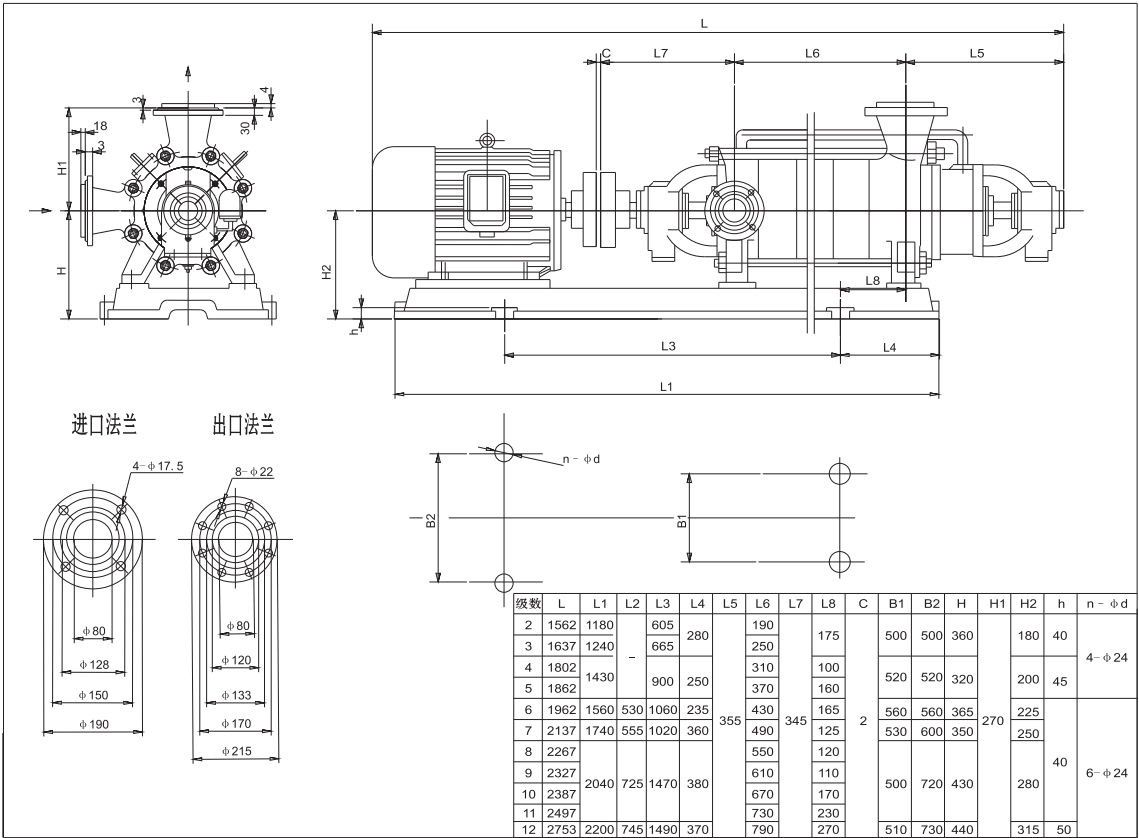


D46-50 外形安装图

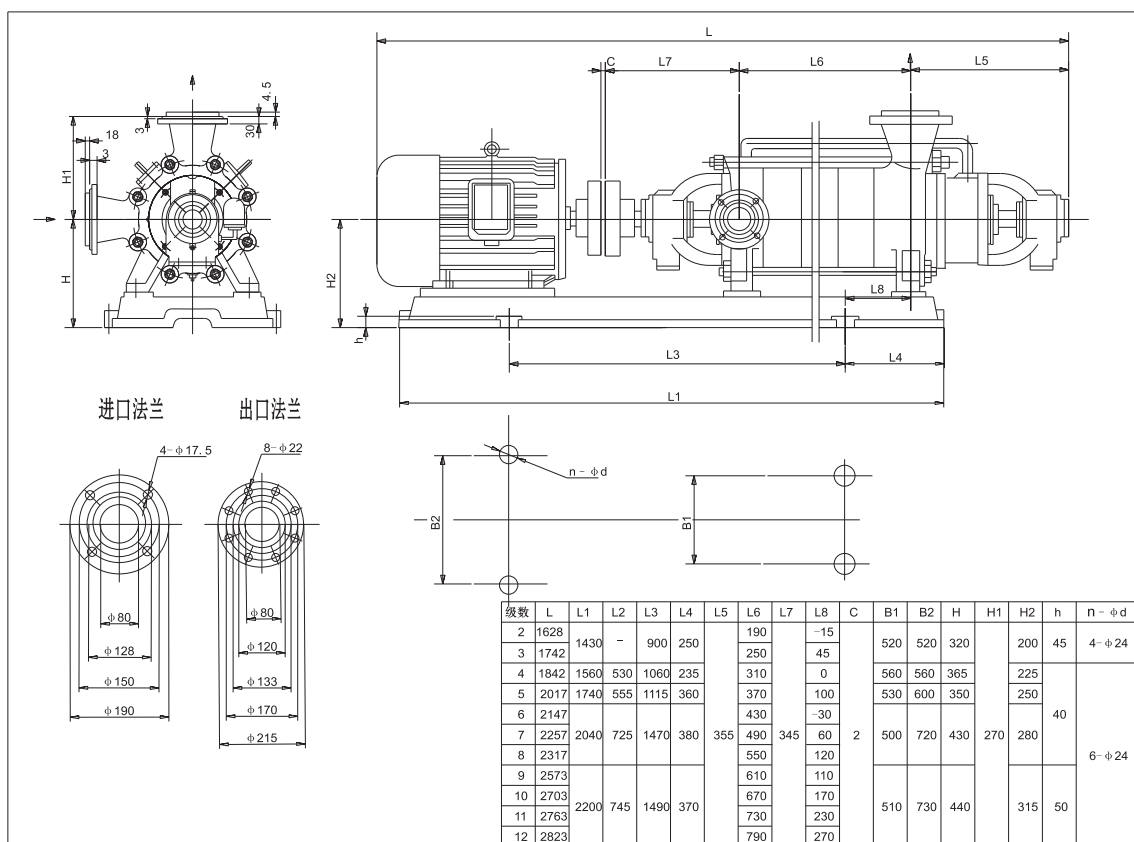


D85-67 外形安装图

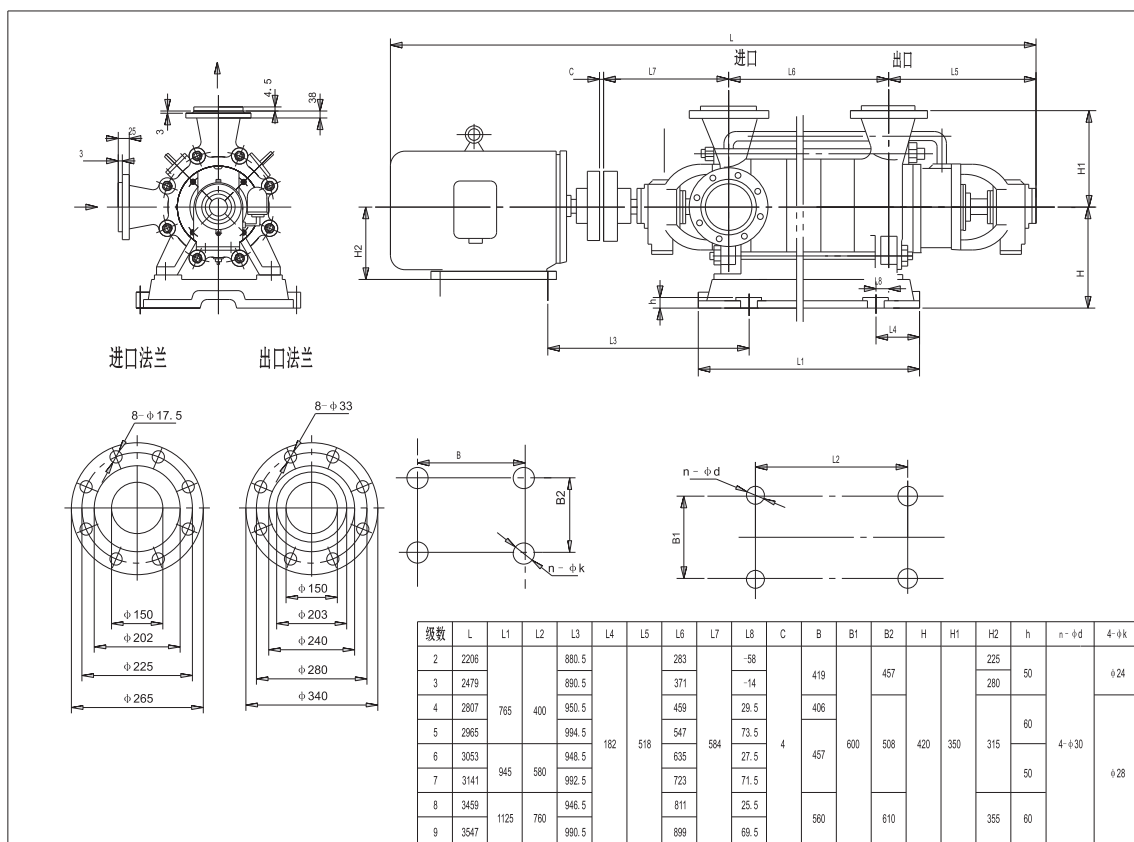


D155-30 外形安装图

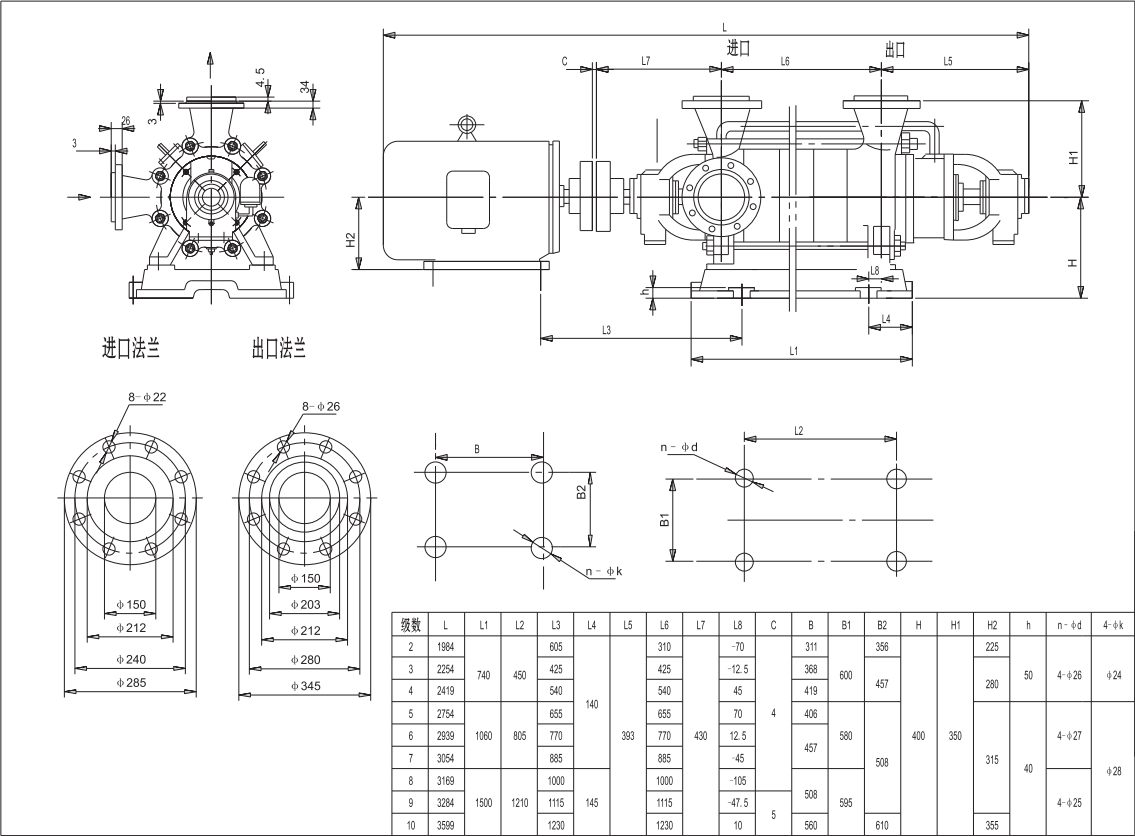


D155-67 外形安装图

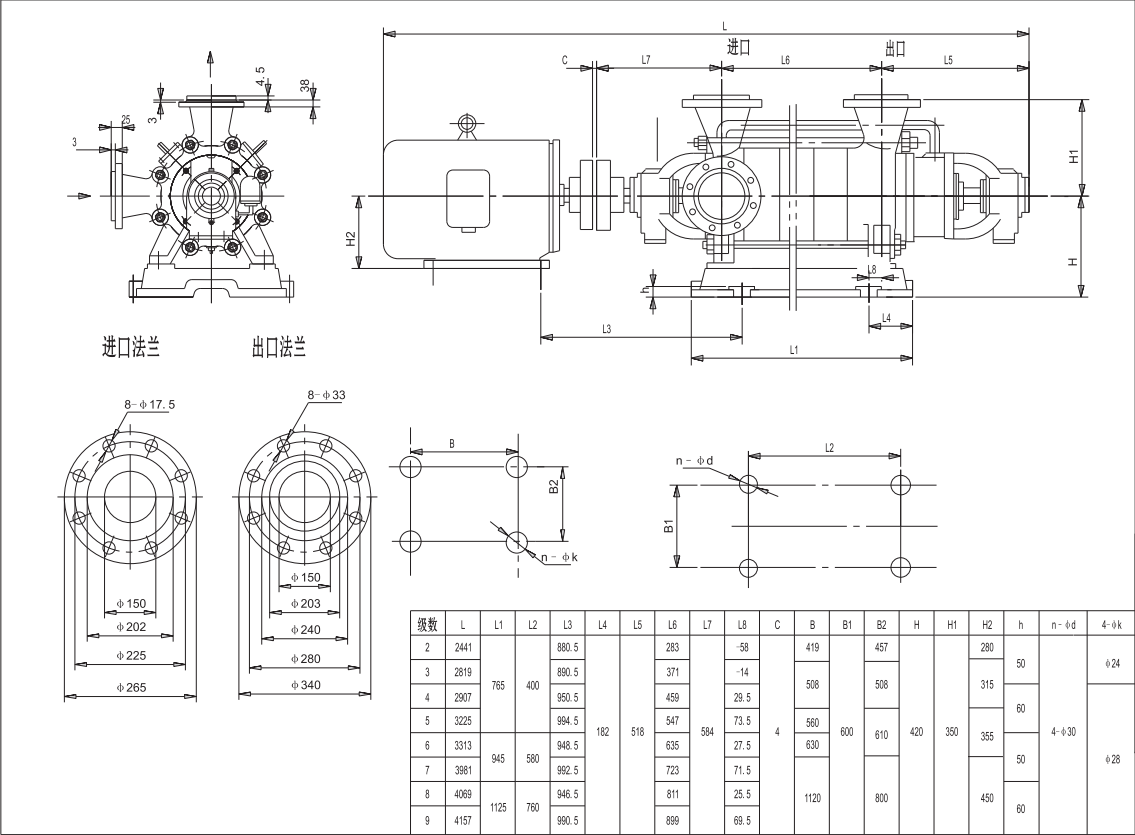


D280-43 外形安装图

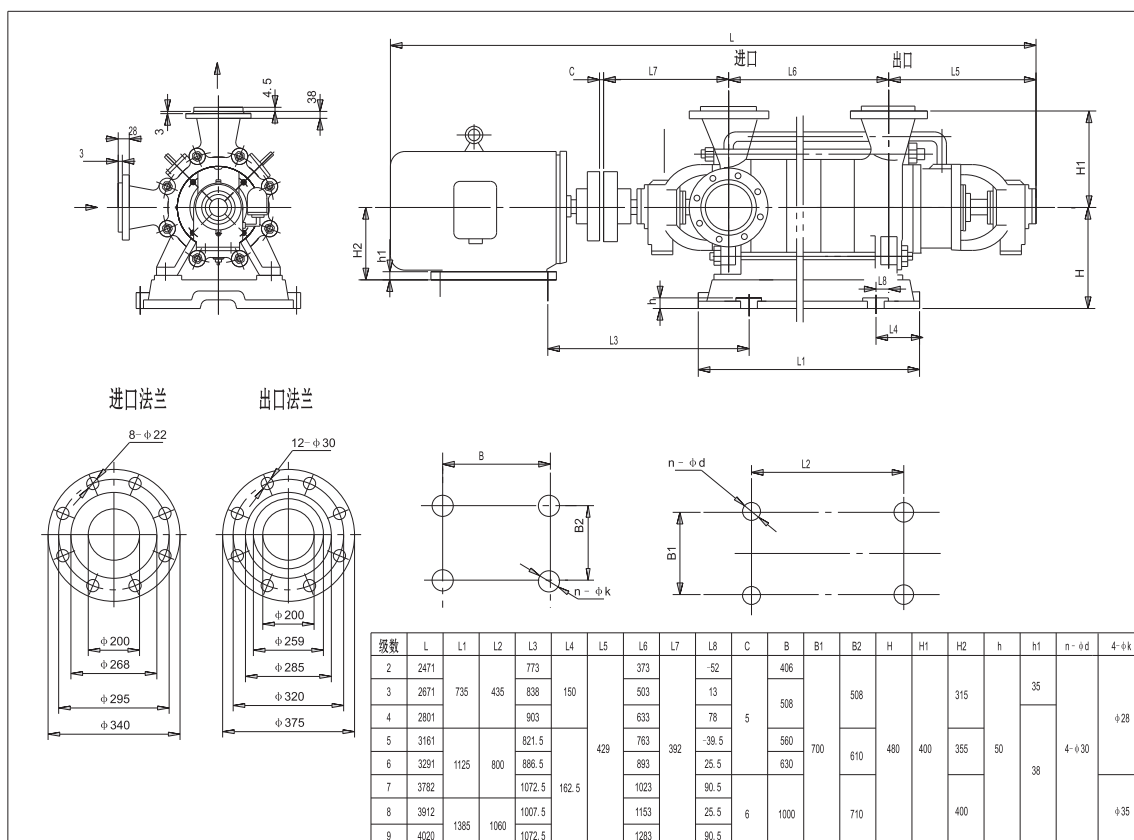


D280-65 外形安装图

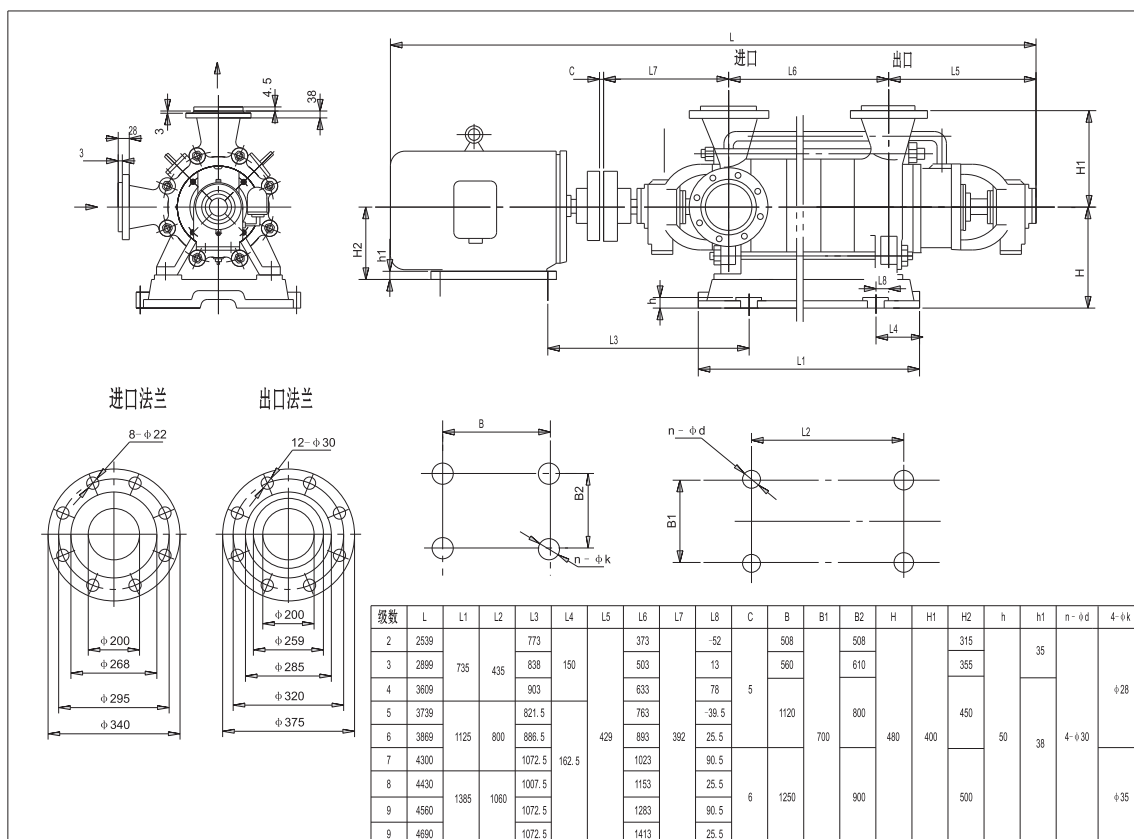


D360-57 外形安装图

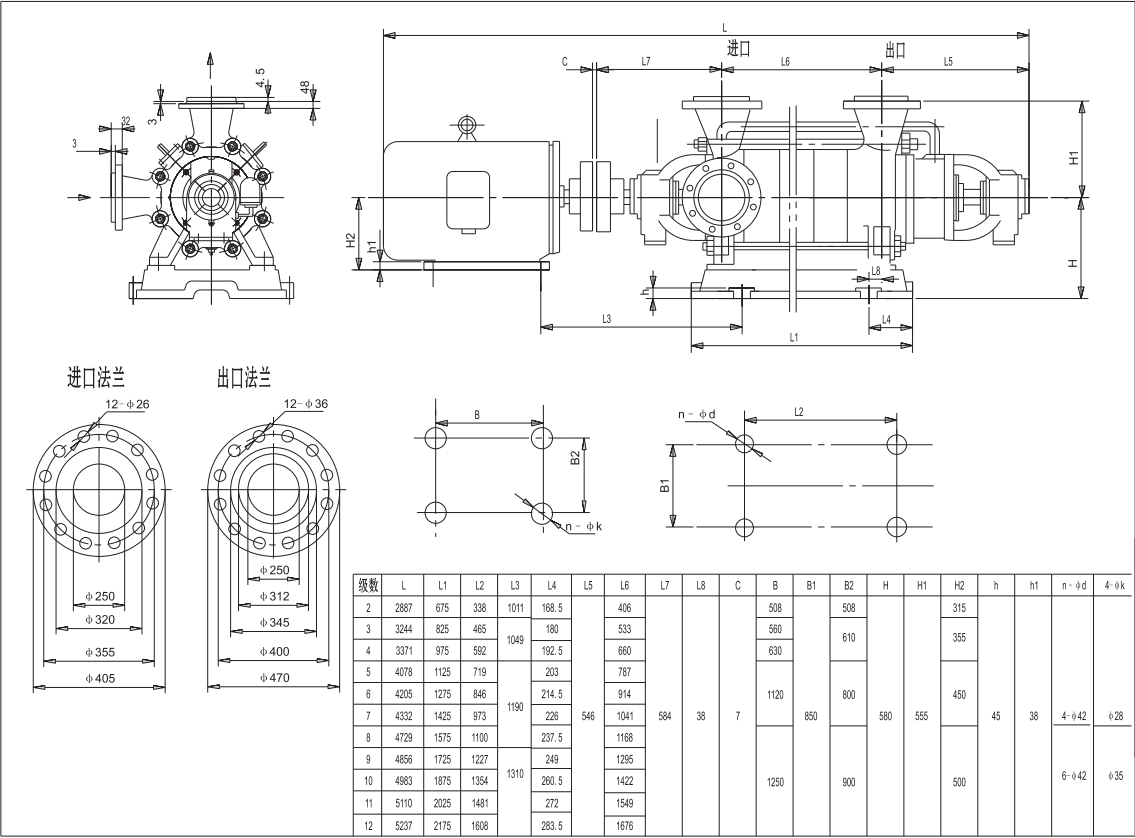


D450-60 外形安装图

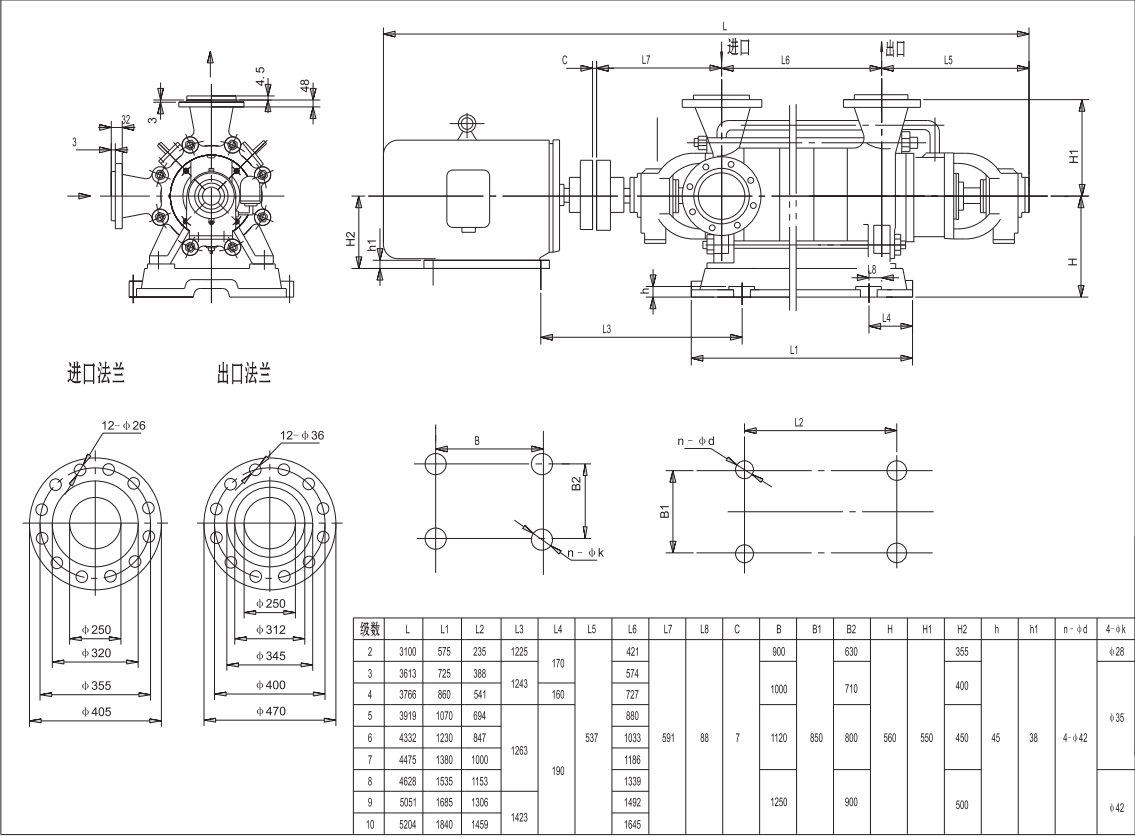

D600-80 外形安装图

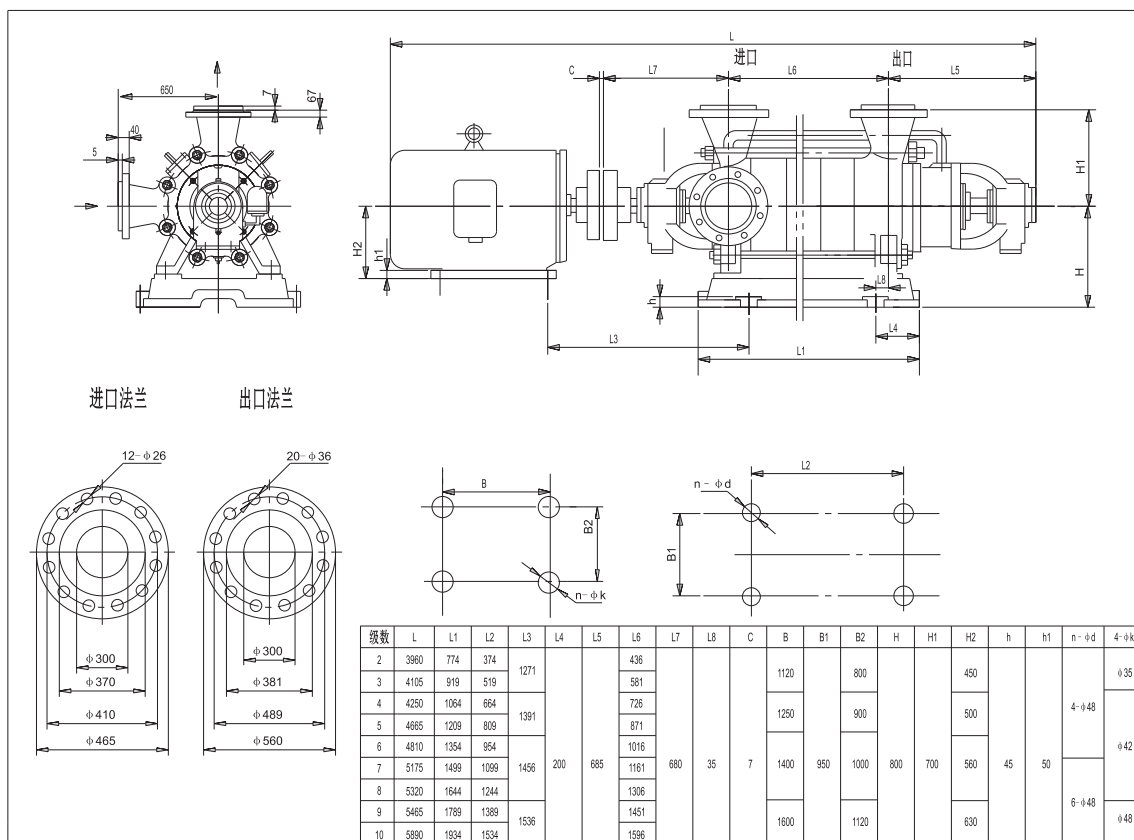

D850-100 外形安装图

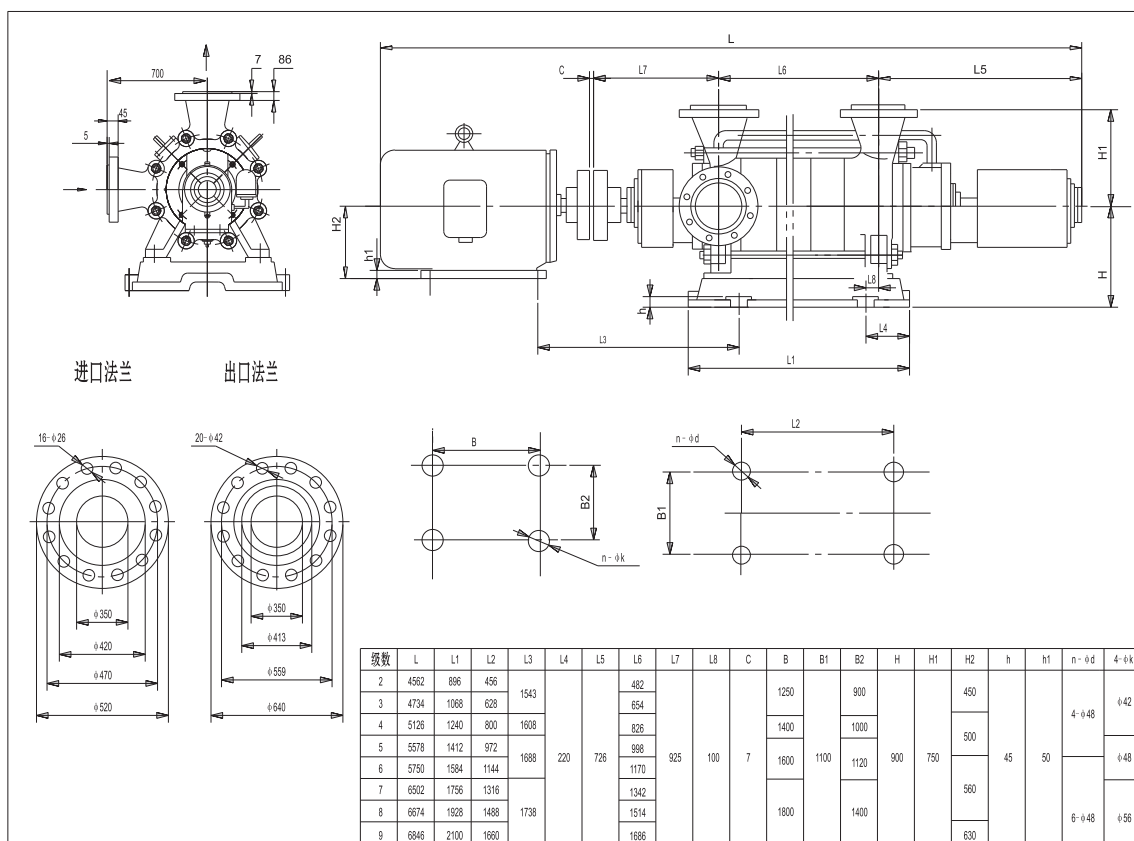

По вопросам продаж и поддержки обращайтесь: csn@nt-rt.ru

www.cnprussia.nt-rt.ru

Архангельск (8182)63-90-72,
Астана+7(7172)727-132,
Белгород(4722)40-23-64,
Брянск(4832)59-03-52,
Владивосток(423)249-28-31,
Волгоград(844)278-03-48,
Вологда(8172)26-41-59,
Воронеж(473)204-51-73,
Екатеринбург(343)384-55-89,
Иваново(4932)77-34-06,
Ижевск(3412)26-03-58,
Казань(843)206-01-48,
Калининград(4012)72-03-81,
Калуга(4842)92-23-67,
Кемерово(3842)65-04-62,
Киров(8332)68-02-04,

Краснодар(861)203-40-90,
Красноярск(391)204-63-61,
Курск(4712)77-13-04,
Липецк(4742)52-20-81,
Магнитогорск(3519)55-03-13,
Москва(495)268-04-70,
Мурманск(8152)59-64-93,
Набережные Челны(8552)20-53-41,
Нижний Новгород(831)429-08-12,
Новокузнецк(3843)20-46-81,
Новосибирск(383)227-86-73,
Орел(4862)44-53-42,
Оренбург(3532)37-68-04,
Пенза(8412)22-31-16,
Пермь(342)205-81-47,
Ростов-на-Дону(863)308-18-15,

Рязань(4912)46-61-64,
Самара(846)206-03-16,
Санкт-Петербург(812)309-46-40,
Саратов(845)249-38-78,
Смоленск(4812)29-41-54,
Сочи(862)225-72-31,
Ставрополь(8652)20-65-13,
Тверь(4822)63-31-35,
Томск(3822)98-41-53,
Тула(4872)74-02-29,
Тюмень(3452)66-21-18,
Ульяновск(8422)24-23-59,
Уфа(347)229-48-12,
Челябинск(351)202-03-61,
Череповец(8202)49-02-64,
Ярославль(4852)69-52-93,